


# D-SUB I.D.C. TYPE

## SPECIFICATION

Current Rate: 3 AMP  
 Insulation Resistance: 1000M  $\Omega$  Min  
 Contact Resistance: 20m  $\Omega$  Max  
 Dielectric voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

## MATERIAL

Insulator: PBT+30% Glass Fiber (UL94V-0)  
 Contact Pin: F: Phosphor Bronze or Brass  
 M: Brass

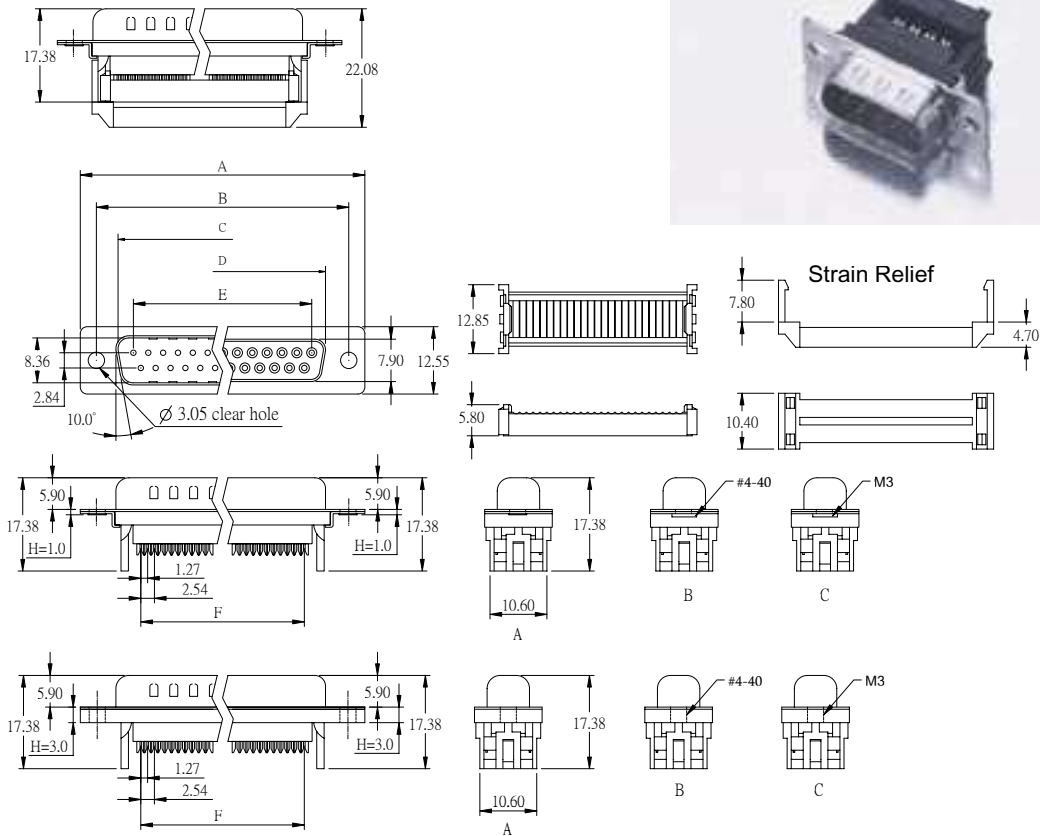

Dimensions

Positions	A	B	C	D	E	F
9	30.81	24.99	16.92	16.33	11.08	10.16
15	39.14	33.32	25.50	24.66	19.39	17.78
25	53.04	47.04	38.96	38.38	33.24	30.48
37	69.32	63.50	55.42	54.84	49.86	45.72

# ORDER INFORMATION

Bestell Code/Order Code: DSK - **1** - **2** - **3** - **4**

- 1** = Polzahl / No. of contacts (9,15,25,37)
- 2** = P: Stecker / Male; S: Buchse / Female
- 3** = UNC 4 - 40
- 4** = Isolierkörper blau / Insulator blue