

SPECIFICATION

Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric voltage:100V AC for one minute
 Operation Temperature:-40 °C to +105 °C

MATERIAL

Insulator:Polyester,UL 94V-0©Standard:P.B.T
 Contact Pin:Copper Alloy

ORDER INFORMATION

PH1S25-1XX-L

©Standard Recommend

No. of contacts per row (02-50)

1: Tin Plated
 TE: Tin 200u"



©G:Gold Flash
 GA:50u"
 GC:20u"
 GD:30u"

S:Selective
 SA:50u"
 SB:10u"
 SC:20u"
 SD:30u"

©B:Black insulator
 W:White insulator
 G:Nylon natural


Fill in Dimension For Special Design

L:RoHS + P.B.T

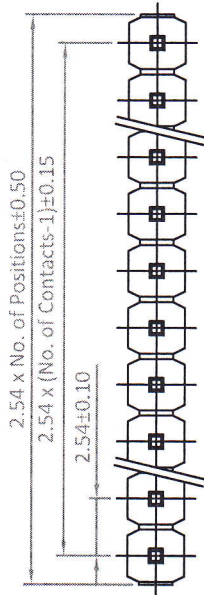

©Standard dimensions

Total length	Dim.A	Dim.B
11.60	6.00	3.00
13.90	8.10	3.30

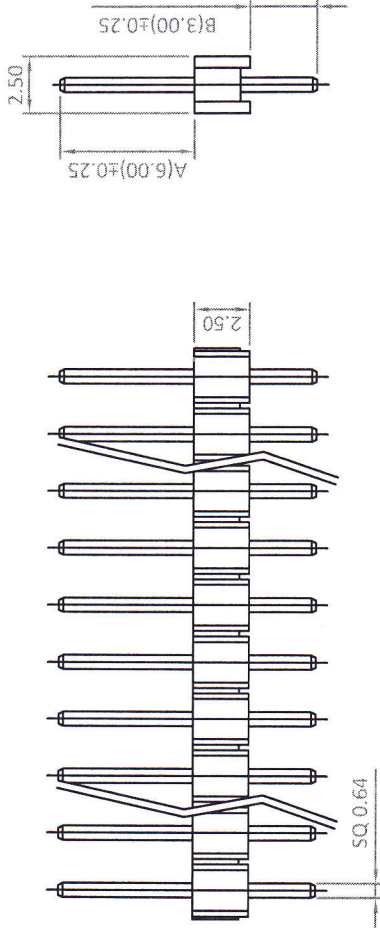

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

品名 TITLE		PIN HEADER 2.54mm STRAIGHT KINK TYPE	
品號 PART NO.	圖號 DRAWING NO.	版本 REV.	日期 DATE
客戶品號 CUSTOMER P/N	PH1S25-1XX-L	A	2012/03/23
公差 TOLERANCE	X ±0.35 .XX ±0.25	比例 SCALE	繪圖 DRAWN
		單位 UNIT	核對 CHECKED
		mm	Joe
			核 准 APPROVED
			James

DATE

DESCRIPTION

AREA REV.