


Federleiste

Einreihig

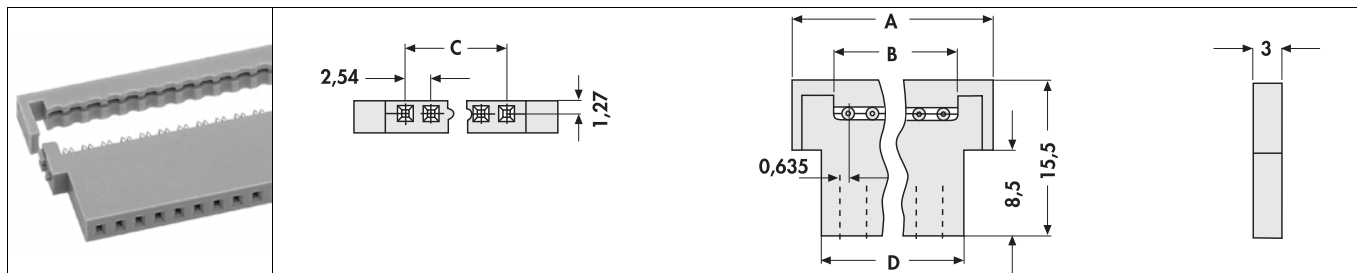

| Art. Nr. | Polzahl | Maße [mm] | | | |
|------------------|---------|-----------|-------|-------|-------|
| | | A | B | C | D |
| FV 03 ... | 3 | 15,24 | 7,62 | 5,08 | 8,89 |
| FV 04 ... | 4 | 17,78 | 10,16 | 7,62 | 11,43 |
| FV 05 ... | 5 | 20,32 | 12,70 | 10,16 | 7,62 |
| FV 06 ... | 6 | 22,86 | 15,24 | 5,08 | 16,51 |
| FV 07 ... | 7 | 25,40 | 17,78 | 15,24 | 19,05 |
| FV 08 ... | 8 | 27,94 | 20,32 | 17,78 | 21,59 |
| FV 10 ... | 10 | 33,02 | 25,40 | 22,86 | 26,67 |
| FV 12 ... | 12 | 38,10 | 30,48 | 27,94 | 31,75 |
| FV 13 ... | 13 | 40,64 | 33,02 | 30,48 | 34,29 |
| FV 14 ... | 14 | 43,18 | 35,66 | 33,02 | 36,83 |
| FV 16 ... | 16 | 48,26 | 40,64 | 38,10 | 41,91 |
| FV 17 ... | 17 | 50,80 | 43,18 | 40,64 | 44,45 |
| FV 18 ... | 18 | 53,34 | 45,72 | 43,18 | 46,99 |
| FV 20 ... | 20 | 58,42 | 50,80 | 48,26 | 52,07 |
| FV 24 ... | 24 | 68,58 | 60,96 | 58,42 | 62,23 |
| FV 25 ... | 25 | 71,12 | 63,50 | 60,96 | 64,77 |
| FV 36 ... | 36 | 99,06 | 91,44 | 88,90 | 92,71 |

bitte angeben: ... **Kontaktfläche**
G=vergoldet
Z=verzinkt

Empfohlene Steckerstifte

Vierkant 0,635 mm

Länge 5 ... 8 mm

Verwendbare Bandkabel:

Rundleiter-Flachbandleitung:

AWG 28 = massiv oder Litze

AWG 30 = massiv

Leiterquerschnitt:

AWG 28 ... 30 = 0,09 ... 0,05 mm²

Isolations-Ø:

max. 1,1 mm