HF41F

SUBMINIATURE POWER RELAY

c **FU** us

File No.: E133481



File No.: 40020043



File No.: CQC09002035072



Features

- Slim size (width 5mm)
- High breakdowm voltage 4kV (between coil and contacts)
- Surge voltage up to 6kV (between coil and contacts)
- Meeting VDE 0700, 0631 reinforce insulation
- High sensitive: Approx.170mW
- Sockets available
- 1 Form A and 1 Form C configurations
- Class A insulation system
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (28.0 x 5.0 x 15.0) mm

CONTACT DATA
Contact arrangement

Contact arrangement	1A, 1C
Contact resistance	100m Ω max. (at 1A 6VDC) Gold plated: 30m Ω max.(at 1A 6VDC)
Contact material	AgSnO ₂ , AgNi
Contact rating (Res. load)	6A 250VAC/30VDC
Max. switching voltage	277VAC / 30VDC
Max. switching current	6A
Max. switching power	1500VA / 180W
Mechanical endurance	1 x 10 ⁷ ops
Electrical endurance (UL Approval)	1A: 6 x 10 ⁴ ops (at 85°C) 1C: (NO) 3 x 10 ⁴ ops (at 85°C) (NC) 1 x 10 ⁴ ops (at 85°C)

CHARACTERISTICS					
Insulation resistance		1000MΩ (at 500VDC)			
Dielectric	Between coil & contacts		4000VAC 1 min		
strength	Between open contacts		1000VAC 1 min		
Operate time (at nomi.volt.)		8ms max.			
Release time (at nomi.volt.)		4ms max.			
Shock resistance		Functional	49m/s ²		
		Destructive	980m/s²		
Vibration resistance		10Hz to 55Hz 1mm DA			
Humidity		5% to 85% RH			
Ambient temperature		-40°C to 85°C			
Termination		PCB			
Unit weight		Approx. 5.4g			
Construction			Plastic sealed,		

- Notes: 1) The data shown above are initial values.
 - 2) Please find coil temperature curve in the characteristic curves below.
 - 3) When install 1 Form C type of HF41F, please do not make the relay side with 5mm width down.

COIL	
Coil power	5VDC to 24VDC: Approx. 170mW
Coli powei	48VDC, 60VDC: Approx. 210mW

COIL DATA				at 23°C
Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω
5	3.75	0.25	7.5	147 x (1±10%)
6	4.50	0.30	9.0	212 x (1±10%)
9	6.75	0.45	13.5	476 x (1±10%)
12	9.00	0.60	18	848 x (1±10%)
18	13.5	0.90	27	1906 x (1±15%)
24	18.0	1.20	36	3390 x (1±15%)
48	36.0	2.40	72	10600 x (1±15%)
60	45.0	3.00	90	16600 x (1±15%)

Notes: When require pick-up voltage=70% nominal voltage, special order allowed.

SAFETY APPROVAL RATINGS


UL/CUL VDE	6A 30VDC
	Resistive: 6A 277VAC
	Pilot duty: R300
	B300
	6A 30VDC
	6A 250VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2011 Rev. 1.00

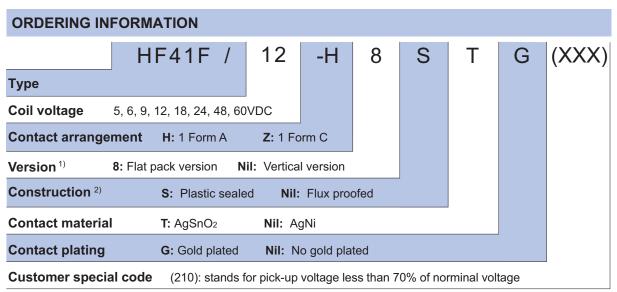


Notes: 1) We recommend flux proofed types for the flat pack version.

2) We recommend flux proofed types for a clean environment (free from contaminations like H2S, SO2, NO2, dust, etc.). We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H₂S, SO₂, NO₂, dust, etc.).

If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

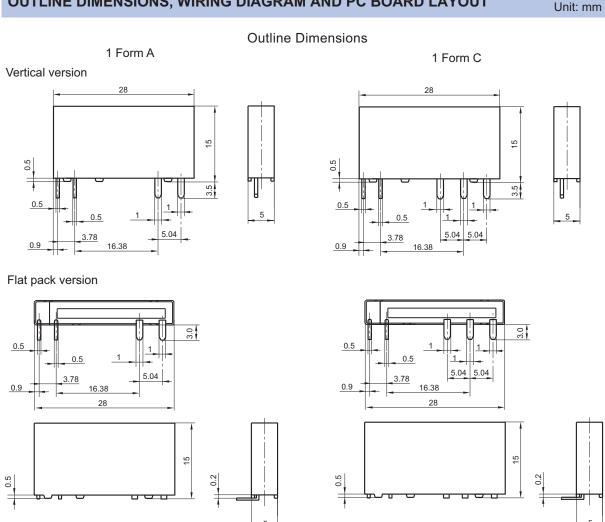



PCB Layout (Bottom view)

1 Form A


1 Form C


Vertical version

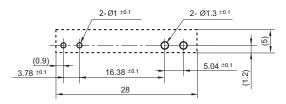

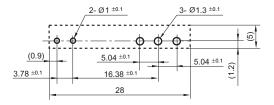



Flat pack version





Wiring Diagram (Bottom view)







Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.


2) The tolerance without indicating for PCB layouts is always ±0.1mm.

CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER







Percentage Of Nominal Coil Voltage

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.