

**! WARNING DO NOT CONNECT DIRECTLY TO AC/DC HIGH VOLTAGE POWER!**  
Read all warnings and installation instructions thoroughly.

**SAFETY & WARNINGS**

- Install in accordance with national and local electrical code regulations.
- This product is intended to be installed and serviced by a qualified, licensed electrician.
- This product must be powered with a compatible Class 2 DC Constant Voltage LED driver (power supply).
- DO NOT power strip light while attached to plastic spool or tightly coiled. Excess heat may melt the spool and/or cause damage to the fixture.
- DO NOT install in location where LED chips are exposed to direct sunlight or damage to the phosphor will occur.
- Ensure applicable wire is installed between driver, fixture, and any controls in between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause a fire.
- Strip light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
- Connectors have a Class 2 amp limit unless otherwise noted.
- Each tape light has a different power consumption rating and maximum run length that must be individually wired to a compatible low voltage (PWM) control or LED driver. Refer to tape light package label or spec sheet for more information.
- Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.




**QUICK SPECS**

<b>Input Voltage</b>	24V DC
<b>MODEL</b>	FINE 42
<b>Maximum Run</b>	5/25 m


<b>Included Model(s)</b>	24V
<b>Ambient Temperature †</b>	-4° ~ 122°F (-20° ~ 50°C)
<b>Environment</b>	Dry location

† Do not install product in an environment outside the listed ambient temperature. Ensure adequate airflow and heatsinking is considered when mounting/installing.


**! Operation Attention:**




Do not bend LED Strip light to a diameter less than 40mm(1.5 inches)




Do not bend LED Strip light like this, and this way will break the LED and bonding pad




Do not fold or crease LED Strip light, and this way will break the LED and bonding pad





Touching LED, pls wear the electrostatic ring for avoiding ESD

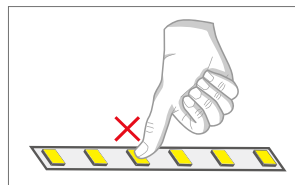


Do not put press heavily or put excessive pressure on surface of LED




Do not connect directly LED Strip light to AC /DC high voltage power!

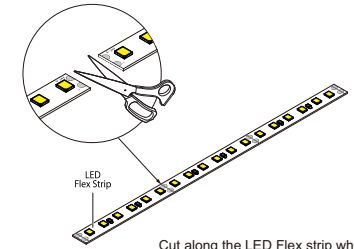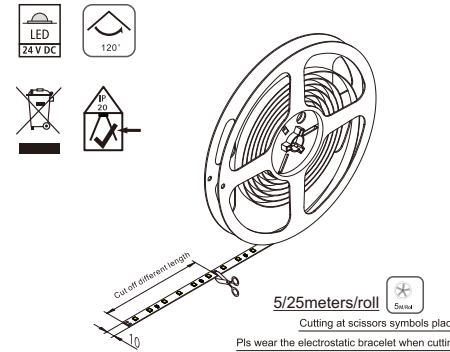

Cut along the LED Flex strip wherever a dashed line divides two sets of positive and negative connection points, and pls wear an electrostatic bracelet.

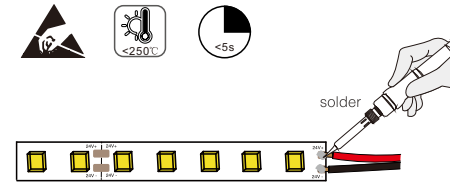

Connecting two welded parts with a maximum temperature of 250 ° C and no more than 5 seconds, and you must wear an electrostatic bracelet.

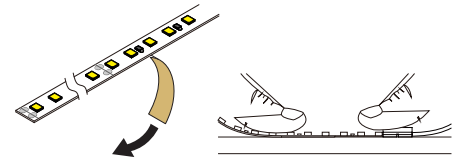

Remove the 3M tape from the connection and Ensure ambient temp is minimum 50 ° F (10 ° C) or tape will not adhere properly. Attach the strip to the installation position, and Adhere to a smooth, dry surface, working one end to the other.

