

**SPECIFICATION**

Current Rate: 16 AMP  
Voltage Rate: 60 V DC Max.  
Contact Resistance: 5 mΩ Max.  
Operation Temperature: -25 °C to +85 °C

**MATERIAL**

Housing: ABS  
Contact: CuZn37-F37



**FINISH**

Contact: Blank

**HANDLING**

Packing: Bulk

**RoHS**  
COMPLIANT

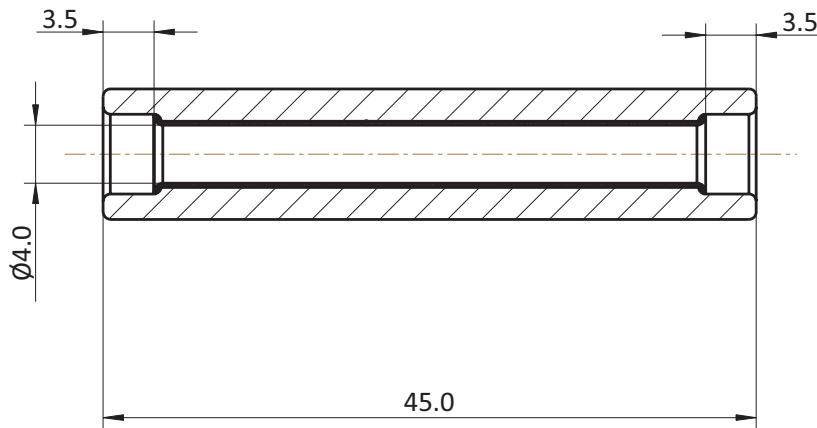

**Order Information**

Series

BAK4

Housing Colour

#

Version

2

Banana Coupling 4 mm

- SW : Black RAL 9005 \*
- RT : Red RAL 3003 \*
- BL : Blue RAL 5017 \*
- GE : Yellow RAL 1021
- GN : Green RAL 6029
- WS : White RAL 9010
- GR : Grey RAL 7040
- BR : Brown RAL 8024
- OR : Orange RAL 2011

2 : sockets on both sides

\* = Standard