

# 9mm (0.36INCH) SINGLE DIGIT NUMERIC DISPLAY

SA36-11EWA

HIGH EFFICIENCY RED


#### **Features**

- •0.36 INCH DIGIT HEIGHT.
- •LOW CURRENT OPERATION.
- •EXCELLENT CHARACTER APPEARANCE.
- •EASY MOUNTING ON P.C. BOARDS OR SOCKETS.
- ●I.C. COMPATIBLE.
- •CATEGORIZED FOR LUMINOUS INTENSITY.
- •MECHANICALLY RUGGED.
- •STANDARD: GRAY FACE, WHITE SEGMENT.
- •Rohs Compliant.

### **Description**

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

## Package Dimensions & Internal Circuit Diagram

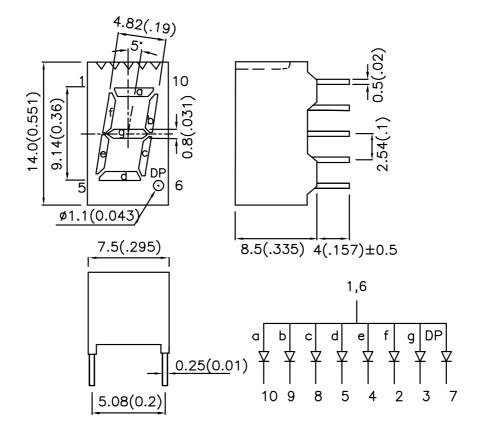

#### Notes:

1. All dimensions are in millimeters (inches), Tolerance is  $\pm 0.25 (0.01")$  unless otherwise noted.

2. Specifications are subject to change without notice.

SPEC NO: DSAC3234 REV NO: V.3 DATE: MAR/25/2005 PAGE: 1 OF 3
APPROVED: J. Lu CHECKED: Joe Lee DRAWN: S.H.CHEN

# **Kingbright**

## **Selection Guide**

Part No.	Dice	Lens Type	lv (ucd) @ 10mA		Description
			Min.	Тур.	•
SA36-11EWA	HIGH EFFICIENCY RED(GaAsP/GaP)	WHITE DIFFUSED	480	1900	Common Anode,Rt. Hand Decimal.

# Electrical / Optical Characteristics at Ta=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	High Efficiency Red	627		nm	IF=20mA
λD	Dominant Wavelength	High Efficiency Red	625		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	High Efficiency Red	45		nm	IF=20mA
С	Capacitance	High Efficiency Red	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	High Efficiency Red	2.0	2.5	V	IF=20mA
lR	Reverse Current	High Efficiency Red		10	uA	VR = 5V

# Absolute Maximum Ratings at Ta=25°C

Parameter	High Efficiency Red				
Power dissipation	105	mW			
DC Forward Current	30	mA			
Peak Forward Current [1]	160	mA			
Reverse Voltage	5	V			
Operating/Storage Temperature	-40°C To +85°C				
Lead Solder Temperature [2]	260°C For 5 Seconds				


#### Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 5mm below package base.


SPEC NO: DSAC3234 REV NO: V.3 DATE: MAR/25/2005 PAGE: 2 OF 3
APPROVED: J. Lu CHECKED: Joe Lee DRAWN: S.H.CHEN


# **Kingbright**

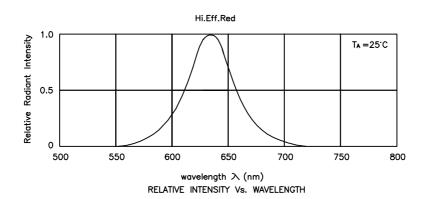



# **High Efficiency Red**

#### **SA36-11EWA**









**DRAWN: S.H.CHEN** 

#### Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

**CHECKED:** Joe Lee

1. Wavelength: +/-1nm

APPROVED: J. Lu

- 2. Luminous Intensity: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

SPEC NO: DSAC3234 REV NO: V.3 DATE: MAR/25/2005 PAGE: 3 OF 3