# Kingbright

# 10mm (0.4INCH) DUAL DIGIT NUMERIC DISPLAY

DA04-11SRWA SUPER BRIGHT RED


### Features

- •0.4 INCH DIGIT HEIGHT.
- •LOW CURRENT OPERATION.
- •EXCELLENT CHARACTER APPEARANCE.
- EASY MOUNTING ON P.C. BOARDS OR SOCKETS.
- •TWO DIGIT PACKAGE SIMPLIFIES ALIGNMENTS & ASSEMBLY.
- ●I.C. COMPATIBLE.
- •MECHANICALLY RUGGED.
- •STANDARD : GRAY FACE, WHITE SEGMENT.
- •RoHS COMPLIANT.

### Description

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

### Package Dimensions & Internal Circuit Diagram

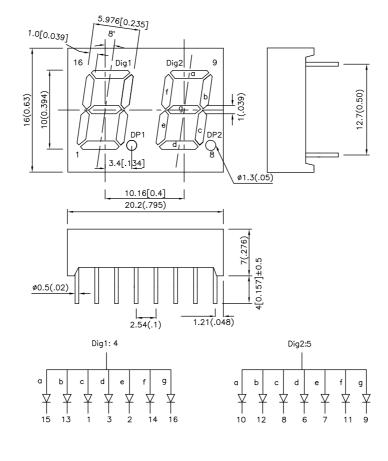

#### Notes:

1. All dimensions are in millimeters (inches), Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.

2. Specifications are subject to change without notice.

SPEC NO: DSAA4478 APPROVED: J. Lu REV NO: V.5 CHECKED: Joe Lee DATE: MAR/28/2005 DRAWN:Y.W.WANG

# Kingbright

Selection Guide										
Part No.	Dice	Lens Type	lv (ucd) @ 10mA		Description					
			Min.	Тур.	-					
DA04-11SRWA	SUPER BRIGHT RED (GaAIAs)	WHITE DIFFUSED	4700	18000	Common Anode					

# Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Super Bright Red	660		nm	IF=20mA
λD	Dominant Wavelength	Super Bright Red	640		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Super Bright Red	20		nm	IF=20mA
С	Capacitance	Super Bright Red	45		pF	VF=0V;f=1MHz
Vf	Forward Voltage	Super Bright Red	1.85	2.5	V	IF=20mA
IR	Reverse Current	Super Bright Red		10	uA	VR = 5V

# Absolute Maximum Ratings at TA=25°C


Parameter	Super Bright Red	Units	
Power dissipation	100	mW	
DC Forward Current	30	mA	
Peak Forward Current [1]	155	mA	
Reverse Voltage	5	V	
Operating/Storage Temperature	-40°C To +85°C		
Lead Solder Temperature [2]	260°C For 5 Seconds		

Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2.5mm below package base.

# Kingbright

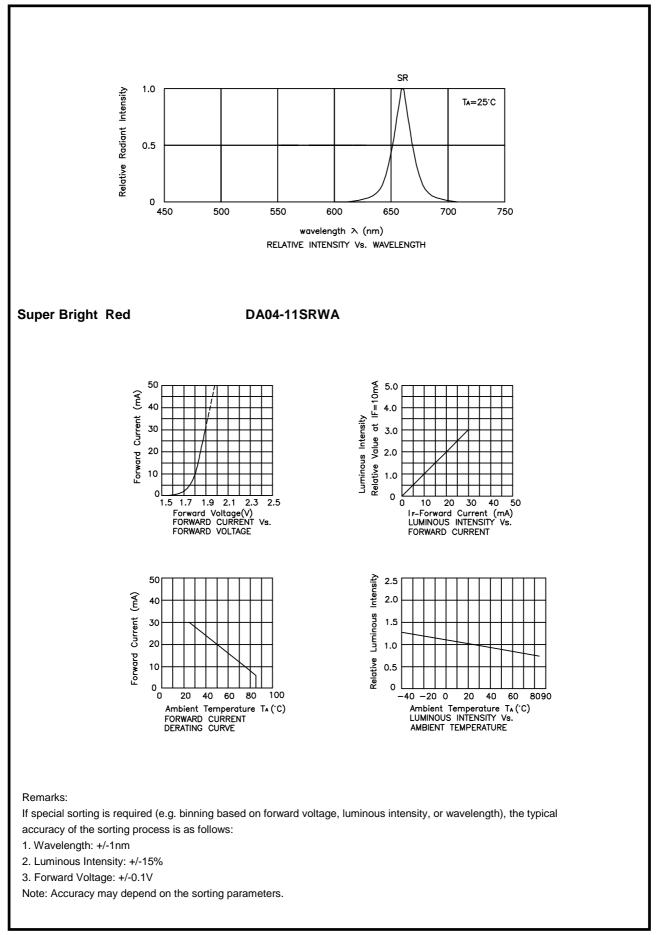

SPEC NO: DSAA4478 APPROVED: J. Lu REV NO: V.5 CHECKED: Joe Lee DATE: MAR/28/2005 DRAWN:Y.W.WANG