





**SPECIFICATION**

Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric Voltage:550V AC for one minute  
 Operation Temperature:-55°C to +105°C

**MATERIAL**

Insulator:Polyester,UL 94V-0  
 Standard:P.B.T  
 Contact Pin:Copper Alloy

**ORDER INFORMATION**

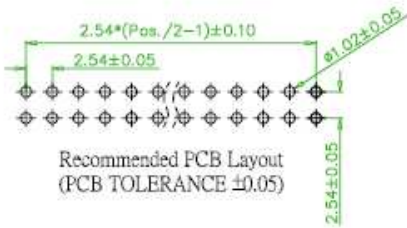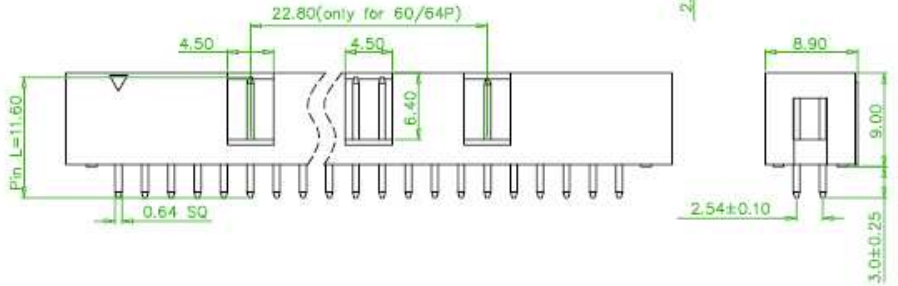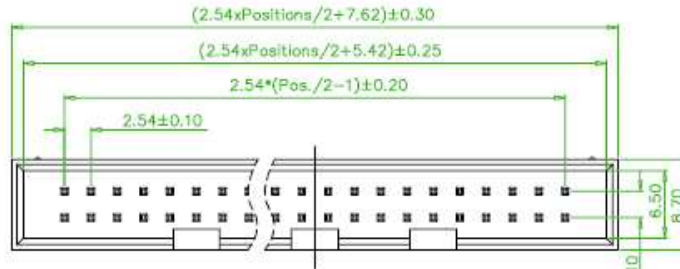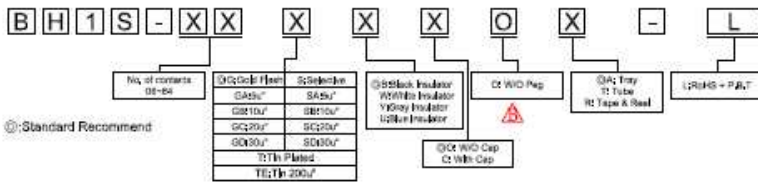

		品名 TITLE	BOX HEADER 2,54mm STRAIGHT TYPE				
		品號 PART NO.	BH1S-XX-L			日期 DATE	2011/01/12
		圖號 DRAWING NO.	BH1S-XX-L	版本 REV.	B	繪圖 DRAWN	
		客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	
		公差 TOLERANCE	X +0.35 XX ±0.25	單位 UNIT	mm	核准 APPROVED	
AREA	REV.	DESCRIPTION	DATE				

△	B	Add the Cap / Peg & Packing Options	
AREA	REV.	DESCRIPTION	DATE