

**SPECIFICATION**

Current Rate:3 AMP

Insulation Resistance:1000M  $\Omega$  Min.Contact Resistance:20m  $\Omega$  Max.

Dielectric Voltage:550V AC for one minute

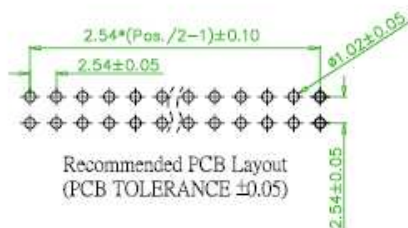
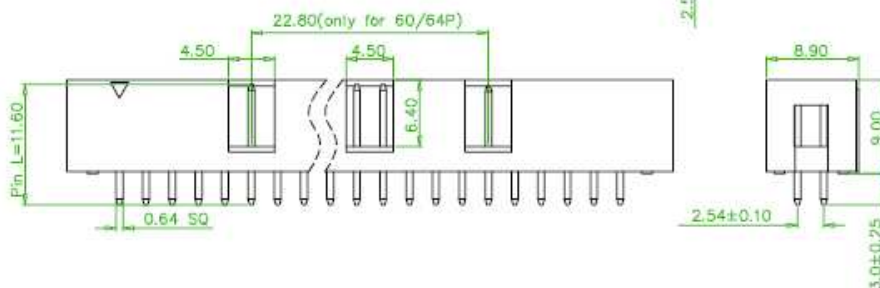
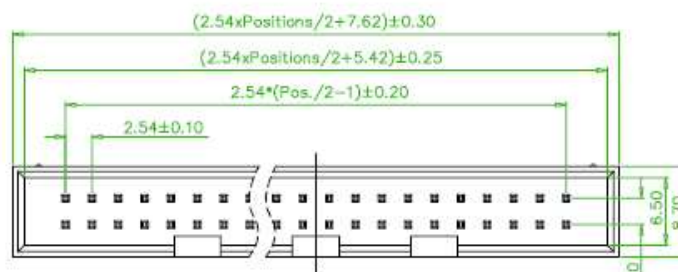
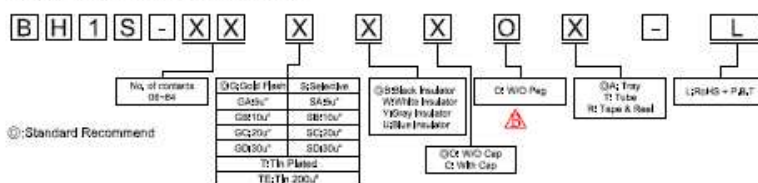
Operation Temperature:-55°C to +105°C

**MATERIAL**

Insulator:Polyester,UL 94V-0

Standard:P.B.T

Contact Pin:Copper Alloy

**ORDER INFORMATION**Recommended PCB Layout  
(PCB TOLERANCE  $\pm 0.05$ )

| ⚠    | B    | Add the Cap / Peg & Packing Options |      |
|------|------|-------------------------------------|------|
| AREA | REV. | DESCRIPTION                         | DATE |

| 品名<br>TITLE          | BOX HEADER 2,54mm STRAIGHT TYPE |             |      |                |            |
|----------------------|---------------------------------|-------------|------|----------------|------------|
| 品號<br>PART NO.       | BH1S-XX-L                       |             |      | 日期<br>DATE     | 2011/01/12 |
| 圖號<br>DRAWING NO.    | BH1S-XX-L                       | 版本<br>REV.  | B    | 繪圖<br>DRAWN    |            |
| 客戶品號<br>CUSTOMER P/N |                                 | 比例<br>SCALE | FREE | 核對<br>CHECKED  |            |
| 公差<br>TOLERANCE      | X +0.35<br>XX +0.25             | 單位<br>UNIT  | mm   | 核准<br>APPROVED |            |