

SPECIFICATION

Current Rate:3 AMP

Insulation Resistance:1000M Ω Min.Contact Resistance:20m Ω Max.

Dielectric Voltage:550V AC for one minute

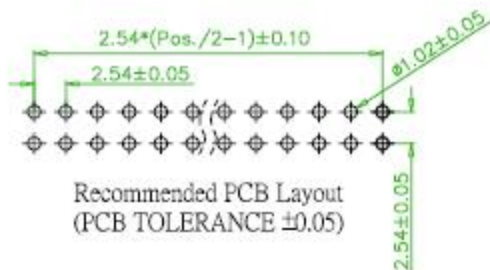
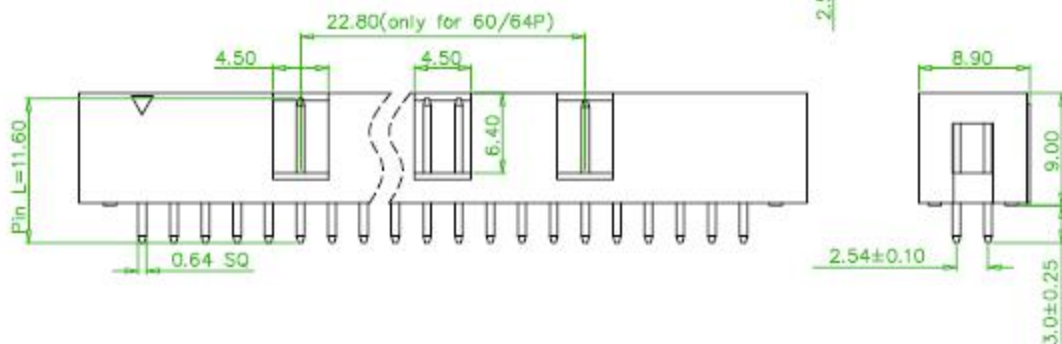
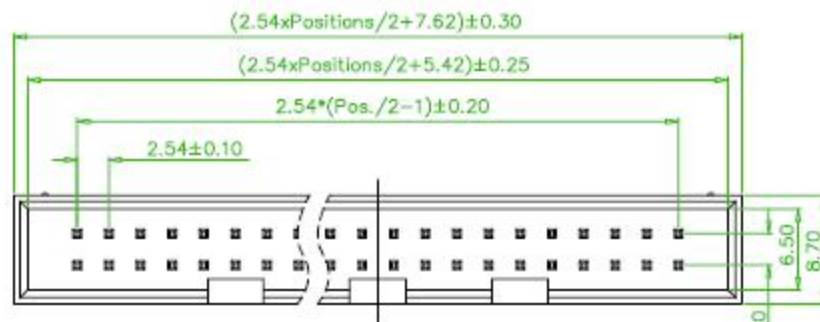
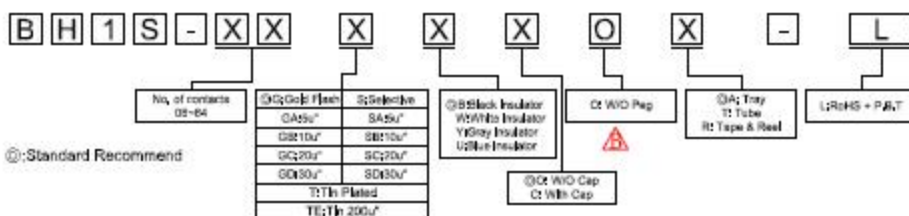
Operation Temperature:-55°C to +105°C

MATERIAL

Insulator:Polyester,UL 94V-0

ⓈStandard:P.B.T

Contact Pin:Copper Alloy

ORDER INFORMATION

	B	Add the Cap / Peg & Packing Options	
AREA	REV.	DESCRIPTION	DATE

品名 TITLE	BOX HEADER 2.54mm STRAIGHT TYPE			
品號 PART NO.	BH1S-XX-L			日期 DATE
圖號 DRAWING NO.	BH1S-XX-L	版本 REV.	B	2011/01/12 繪圖 DRAWN
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	核准 APPROVED