


SPECIFICATION

Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric Voltage:550V AC for one minute
 Operation Temperature:-40°C to +105°C

MATERIAL



Insulator:Polyester,UI, 94V-0
 Standard:P.B.T
 Contact Pin:Copper Alloy

ORDER INFORMATION

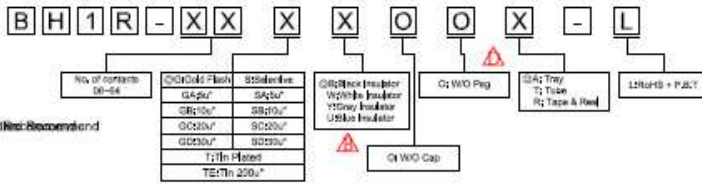

*06P~50P: 1 Key Way
 60P and 64P: 3 Key Way

| POLES | DIM:(mm) | | POLES | DIM:(mm) | |
|-------|----------|-------|-------|----------|-------|
| | A | B | | A | B |
| 06 | 5.08 | 15.24 | 26 | 30.48 | 40.64 |
| 08 | 7.62 | 17.78 | 30 | 35.56 | 45.72 |
| 10 | 10.16 | 20.32 | 32 | 38.1 | 48.26 |
| 12 | 12.70 | 22.86 | 34 | 40.64 | 50.80 |
| 14 | 15.24 | 25.40 | 36 | 43.18 | 53.34 |
| 16 | 17.78 | 27.94 | 40 | 48.26 | 58.42 |
| 18 | 20.32 | 30.48 | 50 | 60.96 | 71.12 |
| 20 | 22.86 | 33.02 | 60 | 73.66 | 83.82 |
| 24 | 27.94 | 38.10 | 64 | 78.74 | 88.9 |

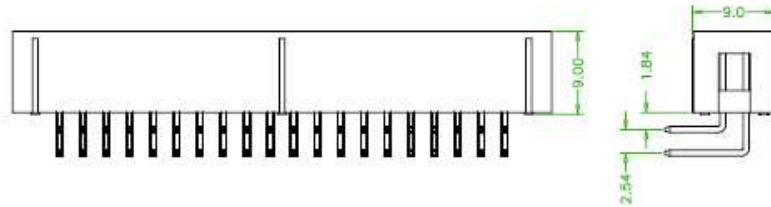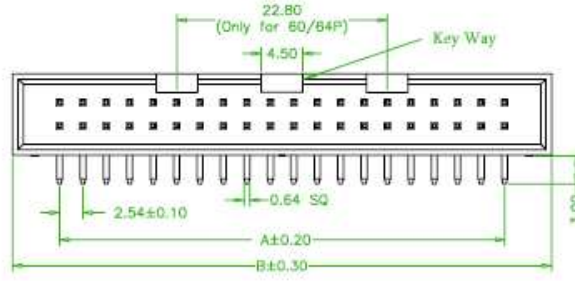

| | | | |
|------|------|---|------|
| △ | D | Add the W/O Cap / Peg & Packing Options | |
| △ | C | Revised the drawing | |
| △ | B | Revised the option: G:Gray → Y:Gray | |
| AREA | REV. | DESCRIPTION | DATE |

| | | | | |
|----------------------|----------------------------|-------------|------|----------------|
| 品名 TITLE | BOX HEADER 2,54mm R/A TYPE | | | |
| 品號 PART NO. | BH1R-XX-L | | | 日期 DATE |
| 圖號 DRAWING NO. | BH1R-XX-L | 版本 REV. | D | 繪圖 DRAWN |
| 客戶品號 CUSTOMER P/N | | 比例 SCALE | FREE | 核對 CHECKED |
| 公差 TOLERANCE | X +0.30 XX +0.25 | 單位 UNIT | mm | 核准 APPROVED |