


B/0	客戶確認,建槽	2005/04/11

HDS - 15 M C N

High Density Solder Type 15,26,44,62,78
 Nickel or Tin or Gold Plated Color(Black,Blue,White or Others)
 Male

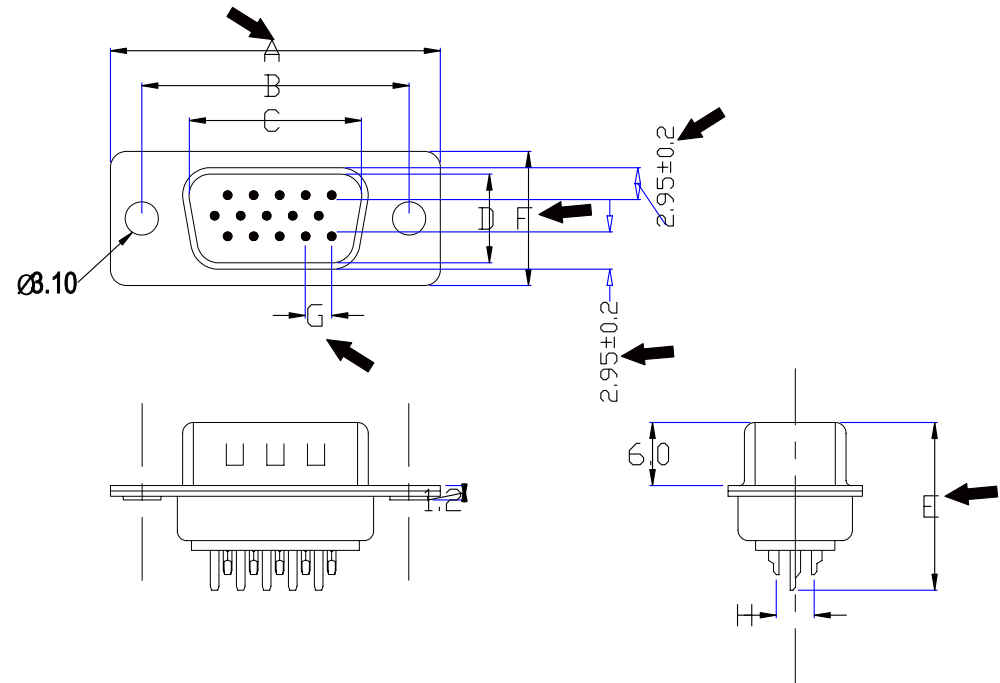

ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING:1AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V R.M.S
 INSULATION RESISTANCE:500 MEGOHMS MINIMUM
 AT DC 500V.
 CONTACT RESISTANCE:30 MILLIOHMS MAXIMUM.
 OPERATING TEMPERATURE:-40°C TO +70°C.

MATERIALS:
 CONTACTS:BRASS.
 INSULATOR:P,B,T,UL 94V-0 RATED.
 SHELL:COLD ROLLED STEEL.

FINISHES:
 CONTACTS:GOLD FLASH ,
 SHELL: NICKELPLATED OR TIN PLATED
 OR ZINC PLATED OR GOLD PLATED OR OTHERS.
 PLASTIC: BLUE OR BLACK OR WHITE OR OTHERS.

POSITION	A±0.3	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2	G±0.2	H±0.1
HDS-15Pin	30.85	25.00	16.92	8.30	16.70	12.55	2.29	3.96
HDS-26Pin	39.25	33.35	25.25	8.30	16.70	12.55	2.29	3.96
HDS-44Pin	53.10	47.04	38.96	8.30	16.70	12.55	2.29	3.96
HDS-62Pin	69.40	63.50	55.42	8.30	16.70	12.55	2.41	3.96
HDS-78Pin	67.08	61.11	52.81	11.30	16.70	15.30	2.41	3.96

成品料號	零件料號			
	前殼	后殼	膠芯	端子
CHHDS15M01A	Nickel plated	Tin plated	Black	Gold flash
CHHDS15M01B	Nickel plated	Tin plated	Blue	Gold flash
CHHDS15M01C	Nickel plated	Tin plated	White	Gold flash
CHHDS15M01D	Nickel plated	Tin plated	Black	Gold plated30u"
CHHDS15M01E	Nickel plated	Tin plated	Blue	Gold plated30u"
CHHDS15M01F	Nickel plated	Tin plated	White	Gold plated30u"

RoHS Compliance

Tolerances Otherwise Stated X. ±0.3 X.X ±0.2 X.XX ±0.1 X.XXX ±0.05 ANGULAR±2°	MATERIAL	CUSTOMER P/N:		
	KSDSMS03			
	KSDSS01			
	TDHDMC03			
	TDHDMC04	CH P/N.:	TITLE: HD 15Pin Male Connector	DWG NO.:CHHDS15M01
	JZHDS15MP01		APP:	CHK:
	JZHDS15MP02		UNIT: mm	SCALE:
			REV: B/0	DATE:2005/04/11