




Specifications

Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min
 Contact Resistance:30m Ω Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-55°C to +105°C

Material

Insulator:PBT+30% Glass Fiber(UL94V-0)
 Contact Pin:Copper Alloy

ORDER INFORMATION

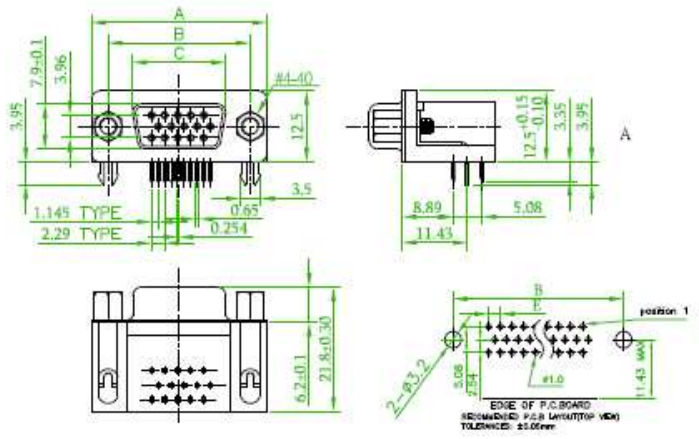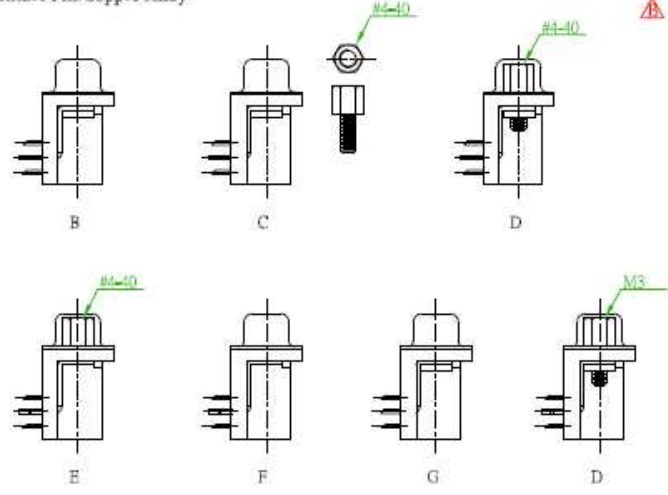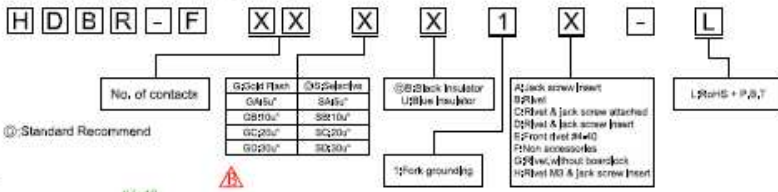

POS.	A	B	C
15	40.80	24.99	16.23
26	49.14	33.52	24.66
44	53.04	47.04	38.38

		品名 TITLE	D-SUB HIGH DENSITY RIGHT ANGLE TYPE		
		品號 PART NO.	HDBR-FXX-L		日期 DATE
		圖號 DRAWING NO.	HDBR-FXX-L	版本 REV.	B
		客戶品號 CUSTOMER P/N		比例 SCALE	FREE
		公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm
				繪圖 DRAWN	
				核對 CHECKED	
				核准 APPROVED	
					2008/11/10

⚠	B	Delete the Tin Plating Options	
AREA	REV.	DESCRIPTION	DATE