





Electrical Characteristics:  
 Contact Current Rating: 3 Amperes.  
 Dielectric Withstanding Voltage: AC 500V at sea level.  
 Insulation Resistance: 1000 Megohms Min.  
 Contact Resistance: 30 Milliohms Max.  
 Operation Temperature: -55°C to +105°C.

Contact :Copper Alloy.  
Insulator:PBT. [Select PA6T /LCP /PA9T]  
Shell: SPCC.  
Z-Piece: Copper Alloy.  
Screw: Copper Alloy.  
Rivet: Copper Alloy. or Zinc.

|   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|
| E | D | B | R | 1 | - | F | X | X |
|---|---|---|---|---|---|---|---|---|

[illegible]

| No. | A     | B     | C     |
|-----|-------|-------|-------|
| 09  | 16.33 | 24.99 | 30.81 |
| 15  | 24.66 | 33.32 | 39.14 |
| 25  | 38.38 | 47.04 | 53.04 |
| 37  | 54.83 | 63.50 | 69.32 |

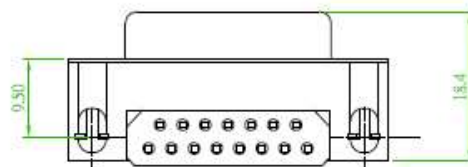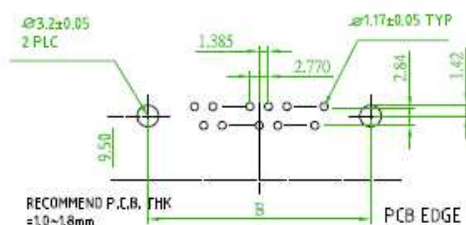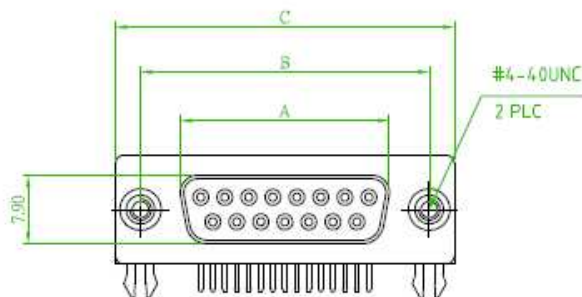

|      |      |             |      |
|------|------|-------------|------|
|      |      |             |      |
|      |      |             |      |
| AREA | REV. | DESCRIPTION | DATE |

|                      |                                        |             |      |                |            |
|----------------------|----------------------------------------|-------------|------|----------------|------------|
| 品名<br>TITLE          | D-SUB RIGHT ANGLE TYPE 7,2mm + FERRITE |             |      |                |            |
| 品號<br>PART NO.       | EDBR1-FXX-L                            |             |      | 日期<br>DATE     | 2009/03/04 |
| 圖號<br>DRAWING NO.    | EDBR1-FXX-L                            | 版本<br>REV.  | A    | 繪圖<br>DRAWN    |            |
| 客戶品號<br>CUSTOMER P/N |                                        | 比例<br>SCALE | FREE | 核對<br>CHECKED  |            |
| 公差<br>TOLERANCE      | X ±0.25<br>XX ±0.2                     | 單位<br>UNIT  | mm   | 核准<br>APPROVED |            |