


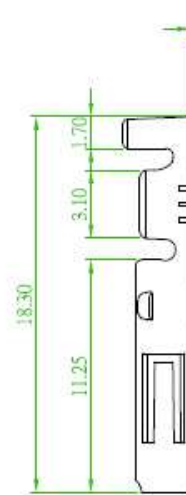
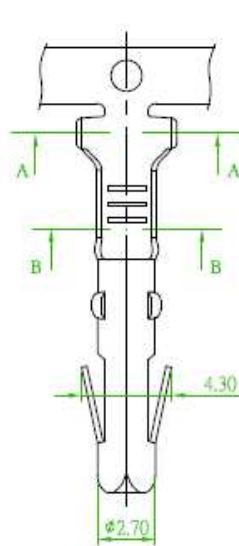

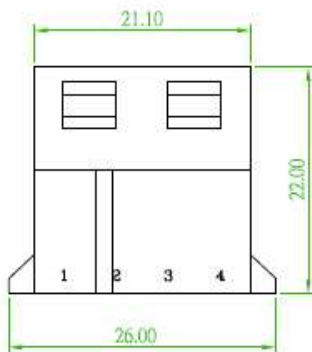


**SPECIFICATIONS**

Current Rating: 5A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-2



SEC:A-A



SEC:B-B



AREA	REV.	DESCRIPTION	DATE

品名 TITLE	5.08mm FEMALE HOUSING + FEMALE TERMINAL			
品號 PART NO.	5082HM-04TF-L			日期 DATE
圖號 DRAWING NO.	240206	版本 REV.	A	繪圖 DRAWN
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED
公差 TOLERANCE	.X ±0.35 XX ±0.25	單位 UNIT	mm	核准 APPROVED