





**SPECIFICATION**

Current Rate:2 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

**MATERIAL**

Insulator:Polyester,UL 94V-0◎Standard:Nylon-6T  
 Terminal:Copper Alloy

**ORDER INFORMATION**

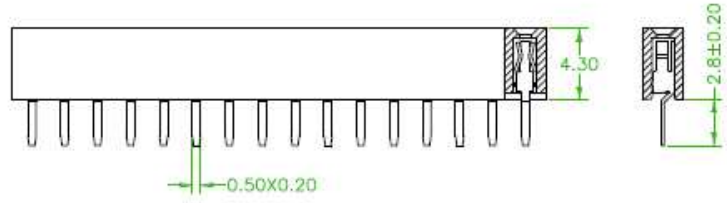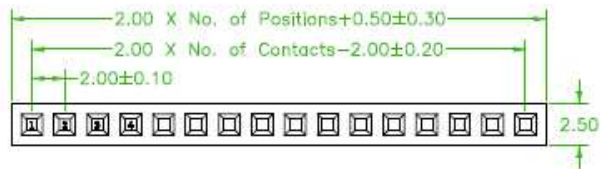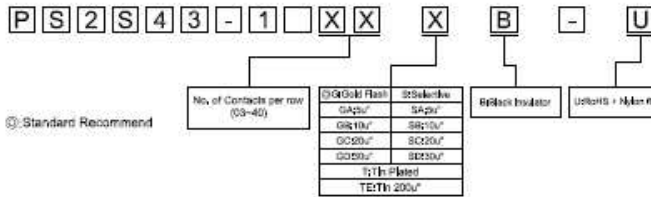

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

品名 TITLE	FEMALE HEADER 2.0mm PLASTIC HEIGHT 4.3mm STRAIGHT				
品號 PART NO.	PS2S43-1XX-U			日期 DATE	2010/02/03
圖號 DRAWING NO.	PS2S43-1XX-U	版本 REV.	A	繪圖 DRAWN	
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	
公差 TOLERANCE	X ±0.20 XX ±0.10	單位 UNIT	mm	核准 APPROVED	

AREA	REV.	DESCRIPTION	DATE