





**SPECIFICATION**

Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:≤20m Ω Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-55°C to +105°C

**MATERIAL**

Insulator Material:Polyester, UL 94V-0  
 ©Standard:Nylon 6T  
 Termianl:Copper Alloy

**ORDER INFORMATION**

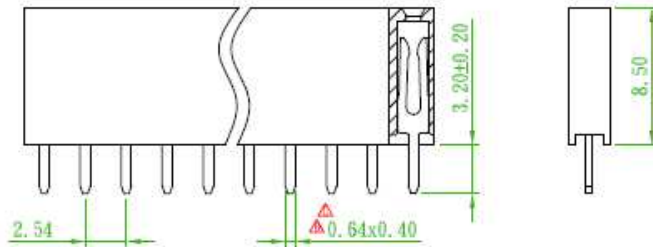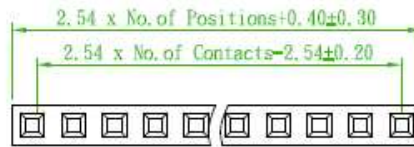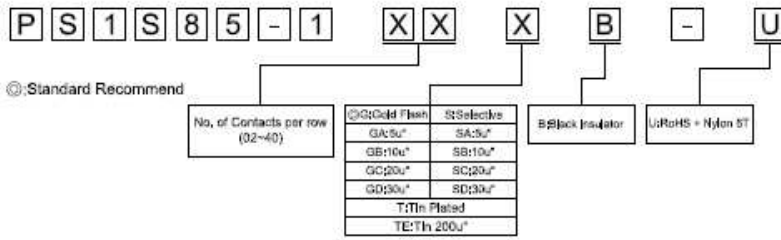

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

		品名 TITLE	Female Herder 2.54 Plastic Height 8.5mm Single Row		
		品號 PART NO.	PS1S85-1XX-U		日期 DATE
		圖號 DRAWING NO.	PS1S85-1XX-U	版本 REV.	C
		客戶品號 CUSTOMER P/N		比例 SCALE	FREE
		公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm
2011/04/07 Shoys					繪圖 DRAWN
2010/05/20 Shoys					核對 CHECKED
					核准 APPROVED

△	C	Revsled the Dlm.: 0.80x0.25→0.64x0.40	2011/04/07 Shoys
△	B	Revsled the Dlm.: 0.64x0.40→0.80x0.25	2010/05/20 Shoys
AREA	REV.	DESCRIPTION	DATE