






Specifications

Current Rate:1 AMP
 Insulation Resistance:1000M Ω Min
 Contact Resistance:20m Ω Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material

Insulator:Polyester,UL 94V-0
 ◎Standard:Nylon 6T + 30%G.F
 Contact Pin:Copper Alloy
 Finish:Gold plated◎Standard:Gold flash all over

ORDER INFORMATION

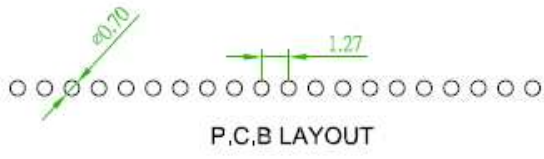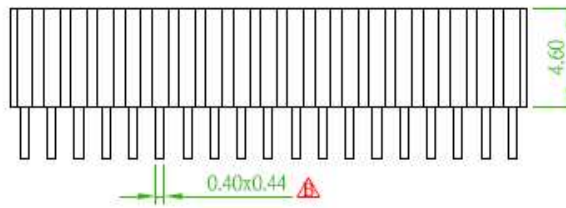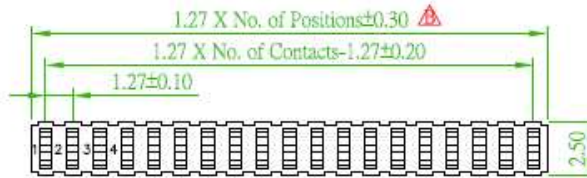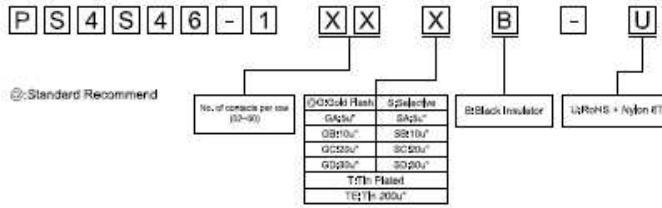

		品名 TITLE	FEMALE HEADER 1.27mm PLASTIC HEIGHT 4.6mm STRAIGHT			
		品號 PART NO.	PS4S46-1XX-U		日期 DATE	2010/05/26
		圖號 DRAWING NO.	PS4S46-1XX-U	版本 REV.	B	繪圖 DRAWN
		客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED
		公差 TOLERANCE	X +0.38 XX ±0.25	單位 UNIT	mm	核准 APPROVED

△	B	Revised the Dim. 0.40±0.50 → 0.40±0.44 1.27 x No. of Positions:0.40 → 1.27 x No. of Positions	
AREA	REV.	DESCRIPTION	DATE