

SPECIFICATION

Current Rate:1 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:15m Ω Max.
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-55°C to +125°C



MATERIAL

Insulator:PBT UL94V-0
 Contact Pin:BeCu Copper

ORDER INFORMATION

M S 1 S - 1 X X S B - L

①:Standard Recommend

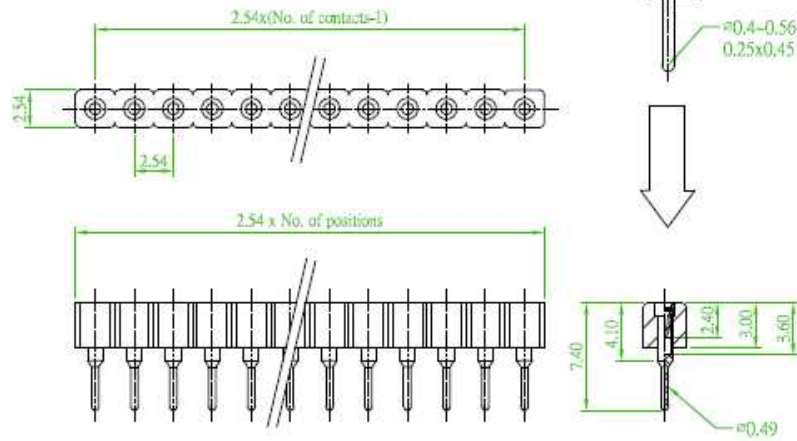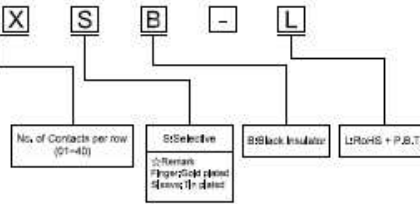

AREA	REV.	DESCRIPTION	DATE

品名 TITLE	MACHINE PIN SOCKET STRIP TYPE 2,54mm				
	品號 PART NO.	MS1S-1XX-L		日期 DATE	08/10/2005
	圖號 DRAWING NO.	MS1S-1XX-L	版本 REV.	A	繪圖 DRAWN
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED
	公差 TOLERANCE	.X ±0.3 XX ±0.25	單位 UNIT	mm	核准 APPROVED