






SPECIFICATION

Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature:-40°C to +105°C

MATERIAL

Insulator Material:Polyester,UL 94V-0
 ◎Standard:Nylon 6T
 Terminal:Copper Alloys

ORDER INFORMATION

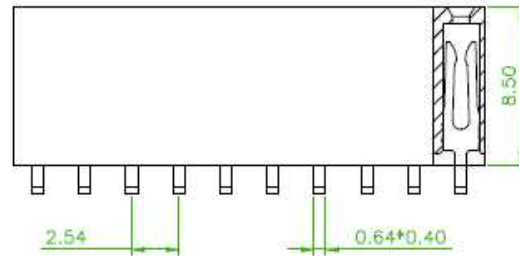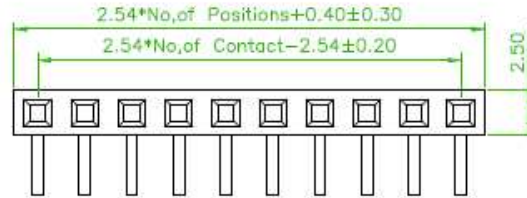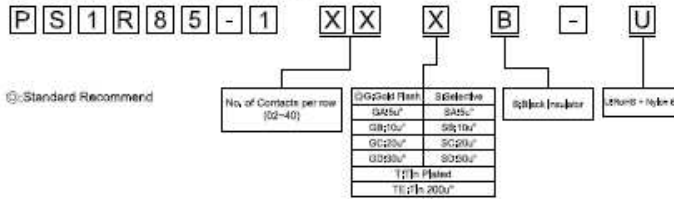

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

<table border="1"> <tr> <td>AREA</td> <td>REV.</td> <td>DESCRIPTION</td> <td>DATE</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>	AREA	REV.	DESCRIPTION	DATE					品名 TITLE	FEMALE HEADER 2.54 PLASTIC HEIGHT 8.5mm RIGHT ANGLE TYPE			
	AREA	REV.	DESCRIPTION	DATE									
	品號 PART NO.	PS1R85-1XX-U			日期 DATE	2010/05/06							
	圖號 DRAWING NO.	PS1R85-1XX-U	版本 REV.	A	繪圖 DRAWN								
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED									
公差 TOLERANCE	X ±0.20 XX ±0.10	單位 UNIT	mm	核准 APPROVED									