ORDER INFORMATION

M J 1 X - B X X - L

- B: ◎Brass; PPhosphor bronze
- X: A:Close 6.5mm; B:Open 6.0mm; C:Open 4.8mm; D:With handle 13.75mm; H:Close 8.0mm; G:Close 8.8mm; HHOpen 8.0mm
- X: ◎GGold Flash; GA:3u"; GB:10u"; GC:20u"; GD:30u"; T:Tin Plated; TE:Tin 200u"
- L: ◎BBlack Insulator; UBlue Insulator; GGray Insulator; RRed Insulator; EGreen Insulator; WWhite Insulator; YYellow Insulator
- L: RoHS + P.B.T

◎:Standard Recommend

Specifications
Current Rate:3 AMP
Insulation Resistance:5000M Ω Min.
Contact Resistance:20m Ω Max.
Dielectric Voltage:100V AC for one minute
Operation Temperature:-40°C to +105°C

Material
Insulator:PBT+30% Glass fiber,UL 94V-0
Contact Pin:Phorphos bronze or brass
Contact Plated:Gold over Nickel or Tin

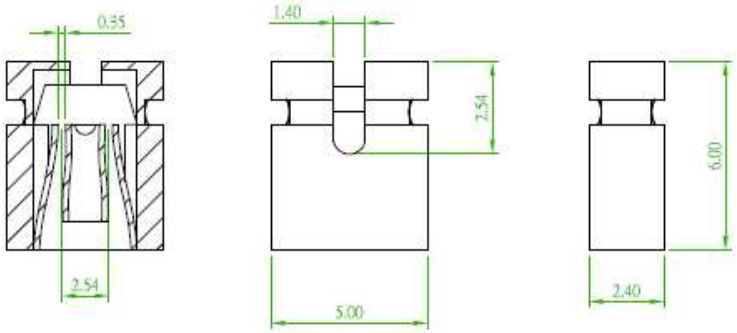

AREA	REV.	DESCRIPTION	DATE
⚠	B	Delete the option of selective gold	

品名 TITLE	MINI JUMPER 2,54mm				
品號 PART NO.	MJ1X-B-L			日期 DATE	08/03/2005
圖號 DRAWING NO.	MJ1X-B-L	版本 REV.	B	繪圖 DRAWN	
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	
公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	核准 APPROVED	