






**Specifications**

Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric voltage:1000V AC for one minute  
 Operation Temperature:-40 °C to +105 °C

**Material**

Insulator:Polyester,UL 94V-0  
 ©Standard:P.B.T  
 Contact Pin:Copper Alloy

**ORDER INFORMATION**

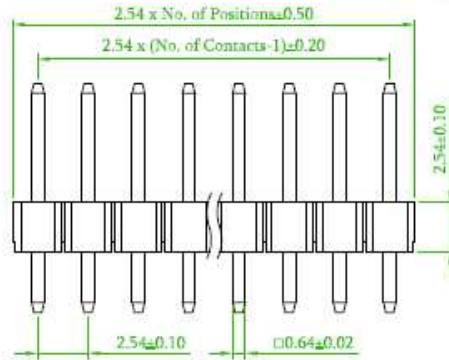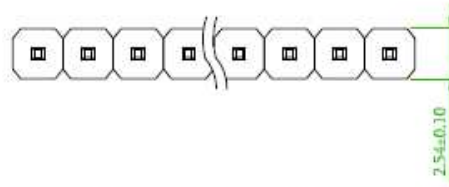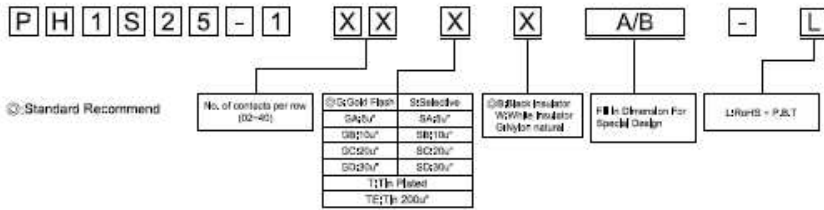

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

<table border="1"> <tr> <td>品名</td> <td colspan="4">PIN HEADER 2.54mm STRAIGHT TYPE PLASTIC HEIGHT 2.54mm</td> </tr> <tr> <td>品號</td> <td colspan="2">PH1S25-1XX-L</td> <td>日期</td> <td>2010/11/24</td> </tr> <tr> <td>圖號</td> <td>PH1S25-1XX-L</td> <td>版本</td> <td>A</td> <td>繪圖</td> </tr> <tr> <td>客戶品號</td> <td></td> <td>比例</td> <td>FREE</td> <td>核對</td> </tr> <tr> <td>公差</td> <td>X +0.35 XX ±0.25</td> <td>單位</td> <td>mm</td> <td>核准</td> </tr> </table>	品名	PIN HEADER 2.54mm STRAIGHT TYPE PLASTIC HEIGHT 2.54mm				品號	PH1S25-1XX-L		日期	2010/11/24	圖號	PH1S25-1XX-L	版本	A	繪圖	客戶品號		比例	FREE	核對	公差	X +0.35 XX ±0.25	單位	mm	核准	<table border="1"> <tr> <td>DATE</td> <td></td> </tr> <tr> <td>DESCRIPTION</td> <td></td> </tr> <tr> <td>REV.</td> <td></td> </tr> <tr> <td>AREA</td> <td></td> </tr> </table>	DATE		DESCRIPTION		REV.		AREA	
	品名	PIN HEADER 2.54mm STRAIGHT TYPE PLASTIC HEIGHT 2.54mm																																
	品號	PH1S25-1XX-L		日期	2010/11/24																													
	圖號	PH1S25-1XX-L	版本	A	繪圖																													
	客戶品號		比例	FREE	核對																													
公差	X +0.35 XX ±0.25	單位	mm	核准																														
DATE																																		
DESCRIPTION																																		
REV.																																		
AREA																																		