






**Specifications**

Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric voltage:1000V AC for one minute  
 Operation Temperature:-40 °C to +105 °C

**Material**

Insulator:Polyester,UL 94V-0  
 ◎Standard:P.B.T  
 Contact Pin:Copper Alloy

**ORDER INFORMATION**

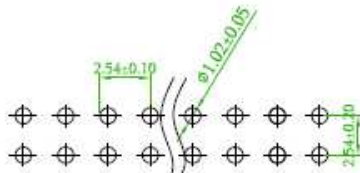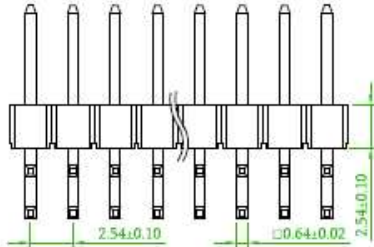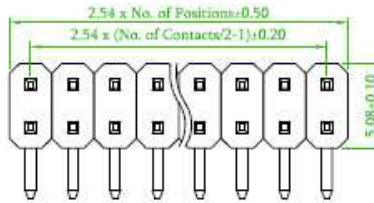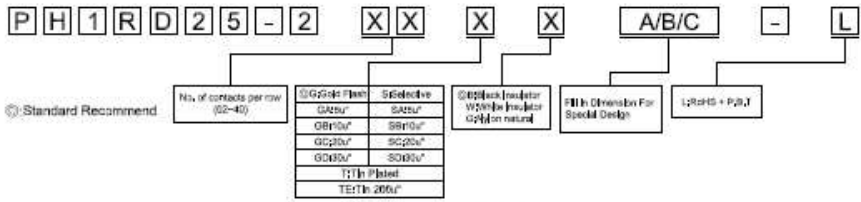

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

品名 TITLE	PIN HEADER 2.54mm RIGHT ANGLE TYPE PLASTIC HEIGHT 2.5mm				
	品號 PART NO.	PH1RD25-2XX-L		日期 DATE	2010/11/24
	圖號 DRAWING NO.	PH1RD25-2XX-L	版本 REV.	A	繪圖 DRAWN
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED
	公差 TOLERANCE	X ±0.35 XX ±0.25	單位 UNIT	mm	核准 APPROVED

AREA	REV.	DESCRIPTION	DATE