






Specifications

Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric voltage:1000V AC for one minute
 Operation Temperature:-40 °C to +105 °C

Material

Insulator:Polyester,UL 94V-0
 ◎Standard:P.B.T
 Contact Pin:Copper Alloy

ORDER INFORMATION

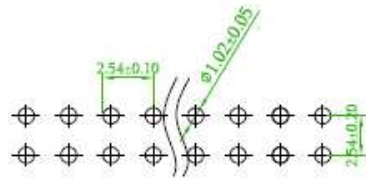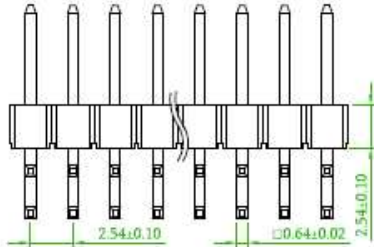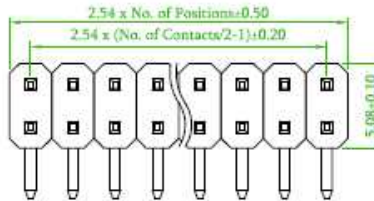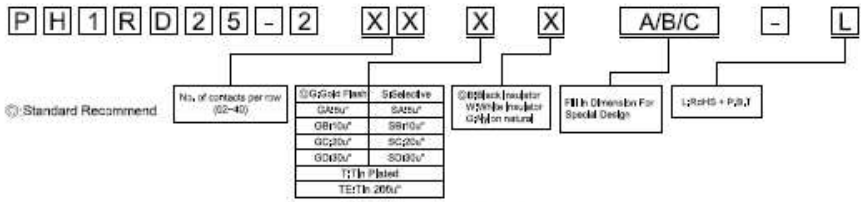

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

	品名	PIN HEADER 2.54mm RIGHT ANGLE TYPE			
	TITLE	PLASTIC HEIGHT 2.5mm			
	品號	PH1RD25-2XX-L			日期
	PART NO.				DATE
	圖號	PH1RD25-2XX-L	版本	A	繪圖
	DRAWING NO.		REV.		DRAWN
	客戶品號		比例	FREE	核對
	CUSTOMER P/N		SCALE		CHECKED
	公差	X ±0.35	單位	mm	核准
	TOLERANCE	XX ±0.25	UNIT		APPROVED

AREA	REV.	DESCRIPTION	DATE