




**SPECIFICATION**

Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric voltage:1000V AC for one minute  
 Operation Temperature:-40 °C to +105 °C

**MATERIAL**

Insulator:Polyester,UL 94V-0◎Standard:P.B.T  
 Contact Pin:Brass  
 Tin,Gold plated◎Standard:Gold flash all over

**ORDER INFORMATION**

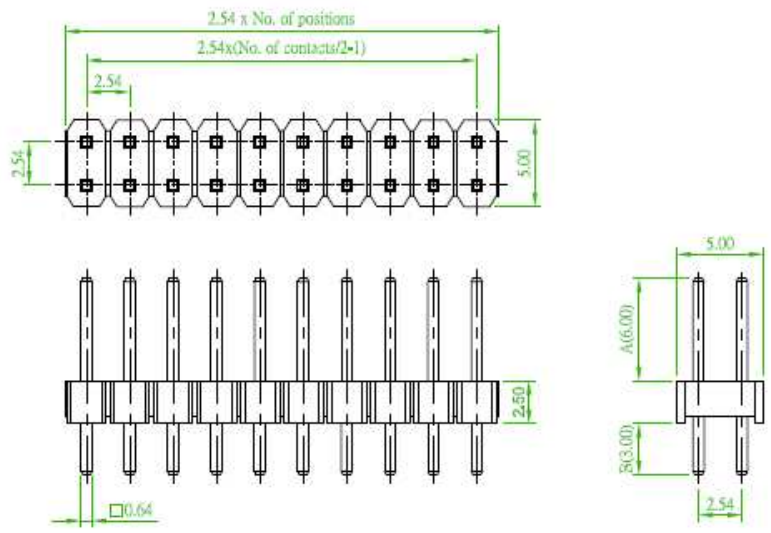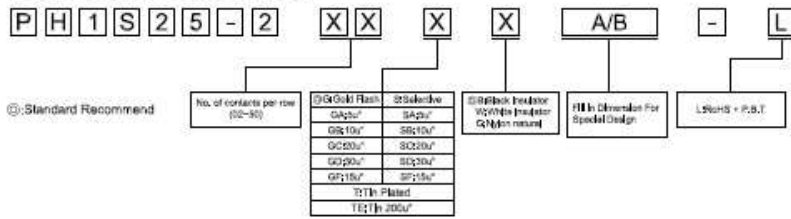

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

AREA	REV.	DESCRIPTION	DATE

品名 TITLE	PIN HEADER 2.54mm STRAIGHT TYPE PLASTIC HEIGHT 2.5mm			
品號 PART NO.	PH1S25-2XX-L			日期 DATE
圖號 DRAWING NO.	PH1S25-2XX-L	版本 REV.	A	繪圖 DRAWN
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED
公差 TOLERANCE	X ±0.35 XX ±0.25	單位 UNIT	mm	核准 APPROVED