Specifications
Current Rate:3 AMP
Insulation Resistance:1000M Ω Min.
Contact Resistance:20m Ω Max.
Dielectric voltage:1000V AC for one minute
Operation Temperature:-40˚C to +105˚C
Material
Insulator:Polyester,UL 94V-0
◎Standard:P.B.T
Contact Pin:Copper Alloy

ORDER INFORMATION

P H 1 D 2 5 - 1 X X X X A/L1/B - L

◎:Standard Recommend

No. of contacts per row (02~40)	◎G:Gold Flash	S:Selective	◎B:Black Insulator W:White Insulator N:Nylon natural	Fill In Dimension For Special Design	L:RoHS + P.B.T
	GA:5u"	SA:5u"			
	GB:10u"	SB:10u"			
	GC:20u"	SC:20u"			
	GD:30u"	SD:30u"			
	T:Tin Plated				
	TE:Tin 200u"				

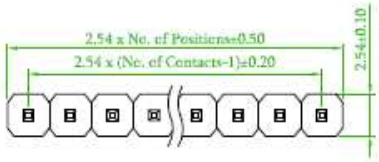

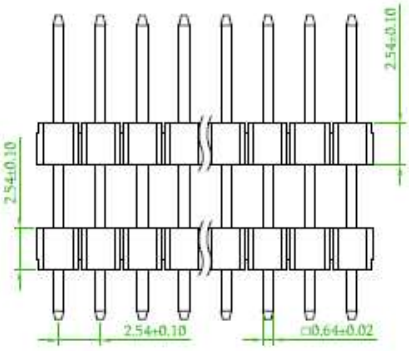





Recommended PCB Layout
(PCB TOLERANCE ±0.05)

AREA	REV.	DESCRIPTION	DATE

品名 TITLE	PIN HEADER 2.54mm STACK STRAIGHT TYPE PLASTIC HEIGHT 2.5mm				
品號 PART NO.	PH1D25-1XX-L			日期 DATE	2010/11/24
圖號 DRAWING NO.	PH1D25-1XX-L	版本 REV.	A	繪圖 DRAWN	
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	
公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	核准 APPROVED	