



LC78_0.5 Cost effective Series

Wide Input Non-Isolated & Regulated, Single Output

Switching Regulator

- ⊕ Cost Effective Switching Regulator
- ⊕ Low Profile (L*W*H=11.6*6.0*10.2)
- ⊕ Wide 4.75V to 28V Operating Input Range
- ⊕ Efficiency up to 95%
- ⊕ Compatible With LM78 Pin-Out
- ⊕ Short Circuit Protection (SCP)
- ⊕ No Heat Sink Required
- ⊕ Low Ripple and Noise
- ⊕ Low No Load Input Current

The LC78_0.5 series cost effective high efficiency switching regulators are ideally suited to replace LM78xx linear regulators and are pin compatible.

Model selection:
 LC78_yy-pp
 LC=Series; ##=Vout; pp=output current
Example:
 LC78_05-0.5
 LC=Series; ##= 5Vout; pp=0.5A



RoHS

Common specifications	
Short circuit protection:	Continuous, automatic recovery
Temperature rise at full load:	25°C MAX, 15°C TYP
Cooling:	Free air convection
Operation temperature range:	-40°C~+85°C
Storage temperature range:	-55°C ~+125°C
Lead temperature:	300°C MAX, 1.5mm from case for 10 sec
Operating case temperature:	100°C MAX
Temperature coefficient:	-40°C to +85°C ambient 0.025%/°C TYP
Storage humidity range:	< 95%
MTBF (using MIL-HDBK-217F):	+25°C 2578x10 ³ hours +75°C 1371x10 ³ hours
Packing quantities:	42pcs per Tube
Case material:	Non Conductive Black Plastic UL94-V0
Potting material:	Epoxy UL94-V0
Weight:	1.3g

Output specifications						
Item	Test conditions	Min	Typ	Max	Units	
Output voltage accuracy	Full load			±3	%	
Line regulation	Vin= min. to max. at full load			0.5	%	
Load regulation	0% to 100% load			0.6	%	
Ripple + Noise	Vo=5.0VDC at 20MHz Bandwidth			30	mVp-p	
Dynamic load stability	100%-50% load			±80	mV	
Switching frequency			330		KHz	
No load input current	Vin=24VDC at 0% load			6	mA	
Thermal shutdown	Internal IC junction		160		°C	
Max capacitance load				220	µF	

Note:


1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. Only typical models listed. If you need other model, please confirm the power, input voltage and output voltage, and then phone us.

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [A]	Efficiency [Vin. min]	Efficiency [Vin. max]	Package
LC78_03-0.5	4.75-28	3.3	0.5	93	84	SIP3
LC78_05-0.5	6.8-28	5.0	0.5	95	88	SIP3


LC78_0.5 Cost effective Series

Wide Input Non-Isolated & Regulated, Single Output

Typical characteristics

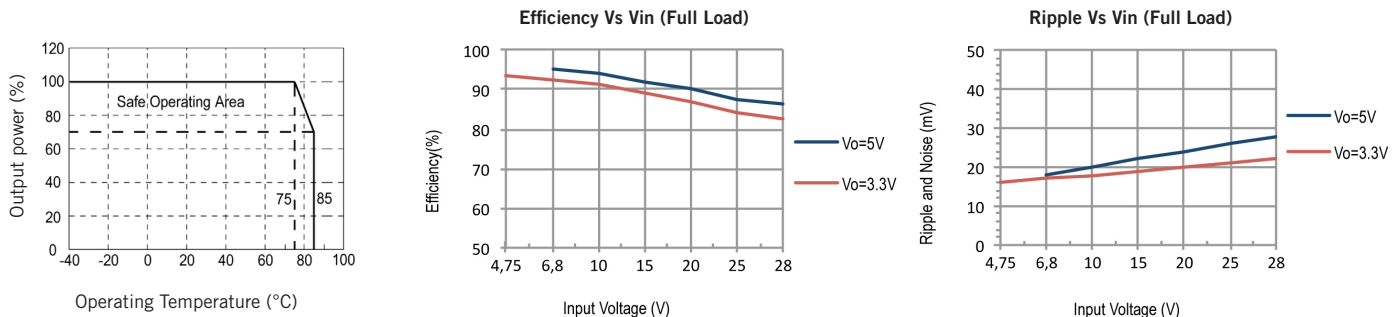


Standard application circuit

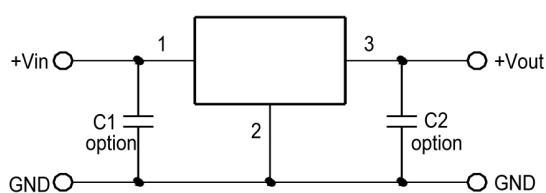


External capacitor table

Part number	C1 (Ceramic Capacitor)	C2 (Ceramic Capacitor)
LC78_03-0.5	10µF/50V	22µF/6.3V
LC78_05-0.5	10µF/50V	22µF/10V

Mechanical dimension

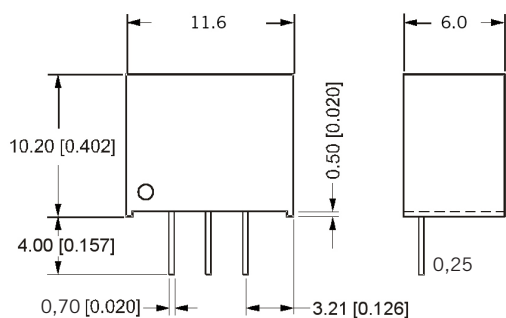


Footprint details

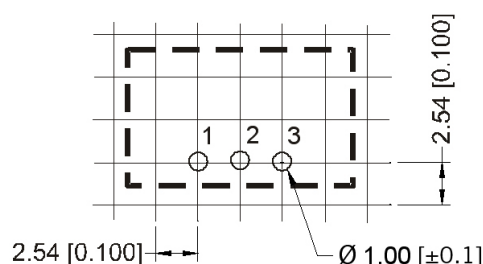

FOOTPRINT DETAILS	
Pin	Positive
1	+Vin
2	GND
3	+Vout

Tube outline dimensions



Note:
L=520 ± 2 mm
Devices per tube quantity: 42 PCS