

Technical specifications


Alkaline

Powerline

Panasonic Typical Dimensions



6LR61AD

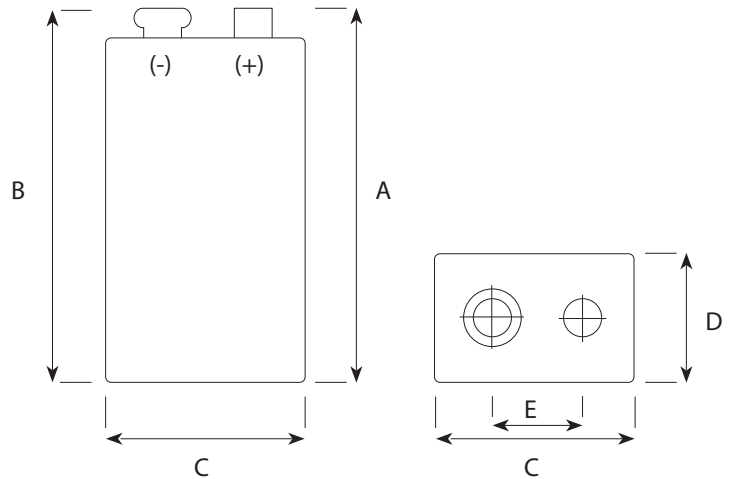

| Dimension | IEC Dimensions (mm) | | Panasonic Dimensions (mm) |
|-----------|---------------------|---------|---------------------------|
| | Maximum | Minimum | Typical |
| A | 48,5 | 46,5 | 48,0 |
| B | 46,4 | | 44,2 |
| C | 26,5 | 24,5 | 25,6 |
| D | 17,5 | 15,5 | 16,5 |
| E | 12,95 | 12,45 | 12,7 |

Specifications

| | |
|------------------------------------|--|
| Name | 9V / 6LR61 / 6AM6 / MN1604 / 1604A / 1604AC |
| Made in | Belgium |
| Type | Alkaline Foil |
| Nominal Voltage | 9 Volt |
| Electrolyte | Potassium Hydroxide |
| Average weight | 44,3 g |
| Storage temp. range | +10°C ~ +25°C |
| Operating temp. range | -20°C ~ +45°C |
| Average Impedance | +/- 2,3 Ohm @ 1kHz fresh |
| Heavy metals | No added mercury (Hg), Cadmium (Cd) or Lead (Pb) |
| Compliant to | IEC 60086 non dangerous goods regulation Nordic ecolabeling (white Swan) EC directive 91/157EC & 98/101EC |
| Recommended cut off voltage | 4,8V per battery |

For more information:

www.panasonic-industrial.com

Panasonic
ideas for life

Typical discharge values

6LR61AD

