

Pin Header
Pitch 2.54 mm SMT, angled

Single row



RoHS
COMPLIANT

SPECIFICATION:

Current rating: 3 A
Insulation resistance: 1000 MΩ min.
Contact resistance: 20 mΩ max.
Dielectric voltage: 1000 V AC
Operation temperature: -40 °C to +105 °C

MATERIAL:



Housing: Nylon 6T UL94V-0
Contacts: Brass

HANDLING:

Processing: Reflow soldering

TOLERANCE:

.X ± 0.25
.XX ± 0.20

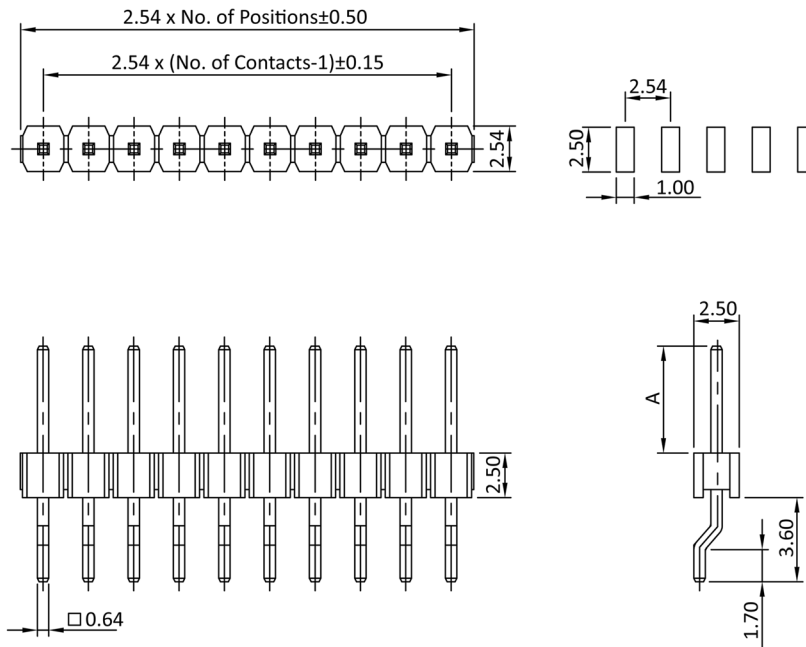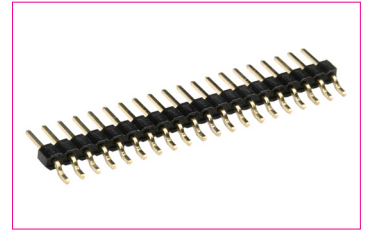

Order-Information

Identifier:	No. of contacts:	Contact Plating:	Version:	Packing:	Length:
PH1S	#	#	#	#	#
Pin Header Pitch 2.54 mm single row angled	2: 1 x 2 3: 1 x 3 4: 1 x 4 : 50: 1 x 50	G: Gold Flash * S: Selective A: 5 μ" Gold B: 10 μ" Gold C: 20 μ" Gold D: 30 μ" Gold T: Tin plated	O: w/o Cap + Peg * C: with Cap P: with Peg T: with Cap + Peg	B: Bag Package * T: Tube * R: T&R	B: A=6.0 * X: Special dimensions also available

* = standard