

Female Header Pitch 2.54 mm SMT

Double row, height 3.55 mm



RoHS
COMPLIANT

SPECIFICATION:

Current rating: 3 A
 Insulation resistance: 1000 MΩ min.
 Contact resistance: 20 mΩ max.
 Dielectric voltage: 1000 V AC
 Operation temperature: -40 °C to +105 °C

MATERIAL:

Housing: Thermoplastic UL94V-0
 Contacts: Copper alloy

FINISH:






Contacts: Gold plated

HANDLING:

Processing: Wave soldering

TOLERANCE:

.X ± 0.20
 .XX ± 0.10

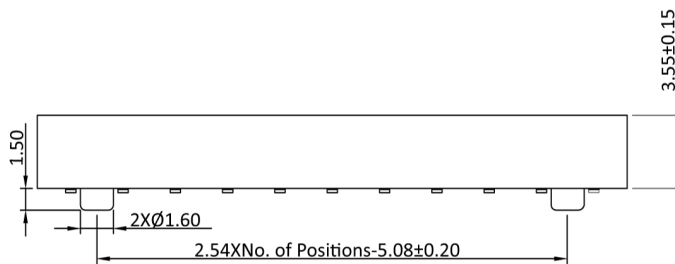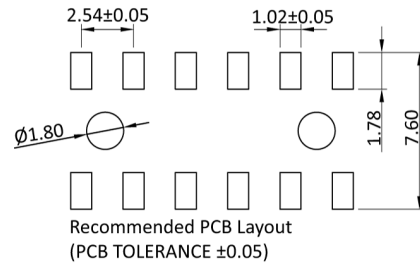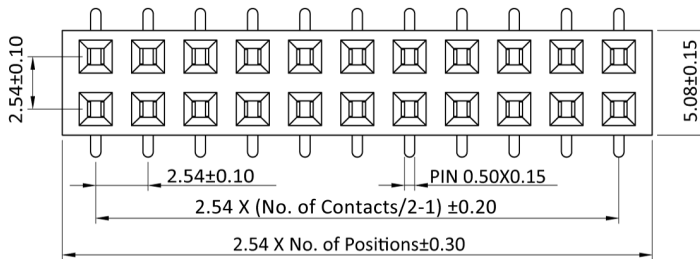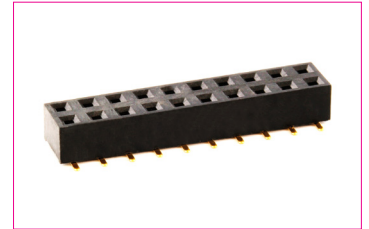

Order-Information

Identifier:	No. of contacts:	Contact plating:	Version:	Packing:
FHS35D	#	#	#	#
SMT Female header pitch 2.54 mm double row, height 3.55 mm	6: 2 x 3 8: 2 x 4 10: 2 x 5 : 80: 2 x 40	G: Gold flash * S: Selective GA: 5 μ" Gold GB: 10 μ" Gold GC: 20 μ" Gold GD: 30 μ" Gold T: Tin plated	O: without Cap + Peg * C: with Cap P: with Peg T: with Cap + Peg	T: Tube * R: T&R

* = standard