

Flat Cable Connector System DIN 41651 IDC Socket Connectors

Pitch 2.54 mm



RoHS
COMPLIANT

SPECIFICATION:

Current rating: 1 A
 Insulation resistance: 1000 MΩ min.
 Contact resistance: 15 mΩ max.
 Dielectric voltage: 500 V AC
 Operation temperature: -40 °C to +105 °C

MATERIAL:

Housing: PBT UL94V-0
 Pins: Bronze

FINISH:



Contacts: Gold Flash

HANDLING:

Packing: Tray

TOLERANCE:

.X ± 0.20
 .XX ± 0.10

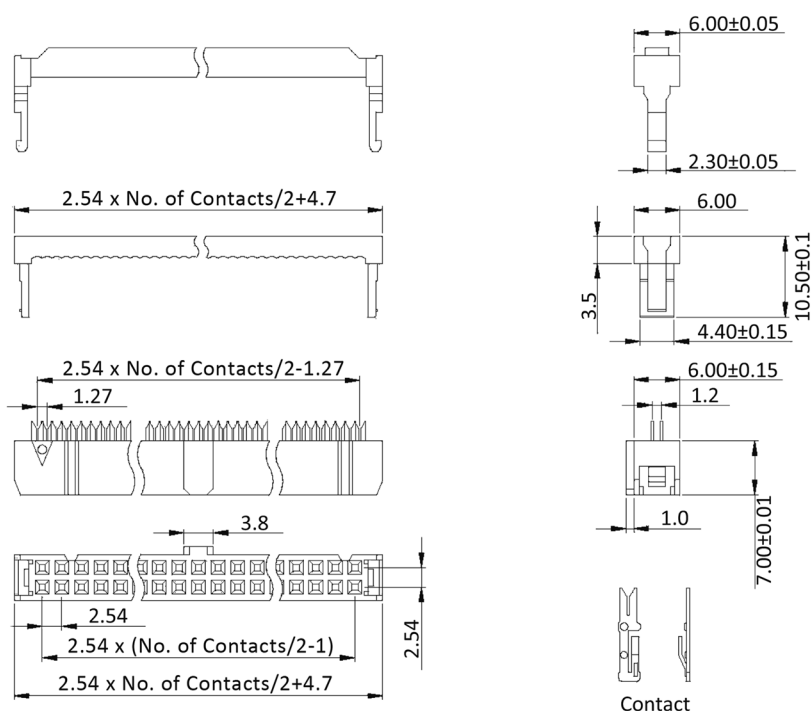

Order-Information

Identifier:	No. of contacts:	Colour:
PV	#	#
IDC Socket Pitch 2.54 mm	6: 2 x 3	empty: black
	8: 2 x 4	
	10: 2 x 5	GR: grey
	12: 2 x 6	
	14: 2 x 7	
	16: 2 x 8	
	18: 2 x 9	
	20: 2 x 10	
	24: 2 x 12	
	26: 2 x 13	
	30: 2 x 15	
	34: 2 x 17	
	36: 2 x 18	
	40: 2 x 20	
	44: 2 x 22	
50: 2 x 25		
60: 2 x 30		
64: 2 x 32		