

**SPECIFICATION:**

Current rating: 1 A  
 Insulation resistance: 500 MΩ min.  
 Contact resistance: 30 mΩ max.  
 Dielectric voltage: 500 V AC  
 Operation temperature: -40 °C to +70 °C

**MATERIAL:**

Insulator: PBT black UL94V-0  
 Shell: Steel




**FINISH:**

Shell: Tin plated

**HANDLING:**

Processing: Crimping  
 Packing: Tray

**RoHS  
COMPLIANT**

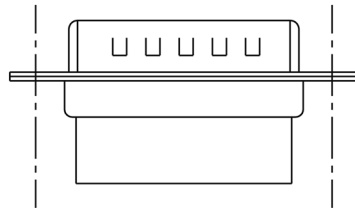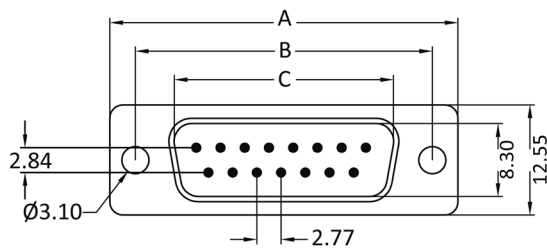

**Dimensions**

No. of contacts:	A:	B:	C:
9	30.85	25.00	16.92
15	39.25	33.35	25.25
25	53.10	47.04	38.96
37	69.40	63.50	55.42

**Order-Information**

Identifier:	No. of contacts:	Version:
ST	#	CR
D-Sub Male Housing	9: 9 pin 15: 15 pin 25: 25 pin 37: 37 pin	CR: Crimp type