

SPECIFICATION:

Current rating: 1 A
 Voltage rating: 30 V
 Insulation resistance: 100 MΩ min.
 Contact resistance: 50 mΩ max.
 Dielectric voltage: 100 V AC
 Operation temperature: -55 °C to +85 °C

MECHANICAL:

Mating force: ≤ 35 N
 Unmating force: ≥ 7 N

MATERIAL:

Insulator: Nylon 9T black UL94V-0
 Shell: Brass
 Contacts: Phosphorbronze

FINISH:

Shell: Nickel plated
 Contacts: Gold Flash in contact area
 Tin plated on solder tails



HANDLING:

Processing: Wave soldering
 Packing: Tray

TOLERANCE:

.X ± 0.25
 .XX ± 0.20

RoHS
COMPLIANT

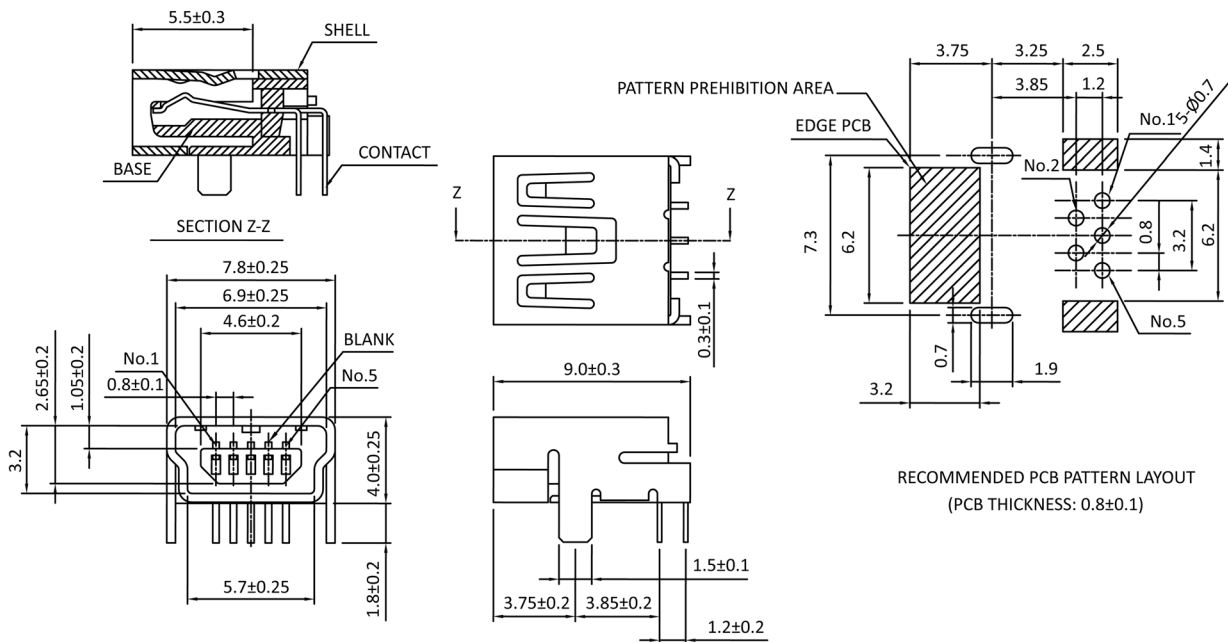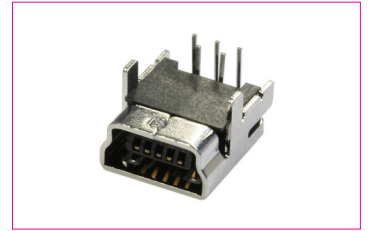

Order-Information

Identifier:

MUB1B5

Socket 5 pin angled