


SPECIFICATION:

Operating Voltage (Max.):	24 Vdc
Operating Current (Nom.):	5 Adc
Insulation Resistance (Min.):	100 MΩ (500 Vdc)
Contact Resistance (Max.):	30 mΩ
Operating Life in Mating Cycles (Min.):	5000
Dielectric Strength:	500 Vac
Insertion Force (Max.):	3 N to 30 N
Extraction Force:	3 N to 30 N

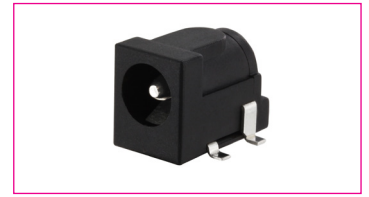

MATERIAL:







Material (Terminal):	copper alloy, silver plated
Material (Housing):	PA 9T
Material (Contact Area):	copper alloy, nickel plated

HANDLING:

Packaging:	reel
------------	------

TOLERANCE:

.X:	± 0.30
-----	--------



Pin Hole Layout
(Jack Bottom View)

Order Information

Identifier:

DC05SN

DC socket angled SMT

Diameter Pin (A)::

#

20: diameter 2.0 mm *

25: diameter 2.5 mm

* = Standard