

Modular Plugs, unshielded

6P4C / 6P6C



SPECIFICATION:

Current rating: 1.5 A
 Insulation resistance: 1000 MΩ min.
 Contact resistance: 40 mΩ max.
 Dielectric voltage: 1000 V AC
 Operation temperature: -40 °C to +70 °C



MATERIAL:



Housing: Polycarbonate UL94V-2
 Contacts: Phosphorbronze

FINISH:

Contacts: Gold Flash

HANDLING:

Packing: Bulk

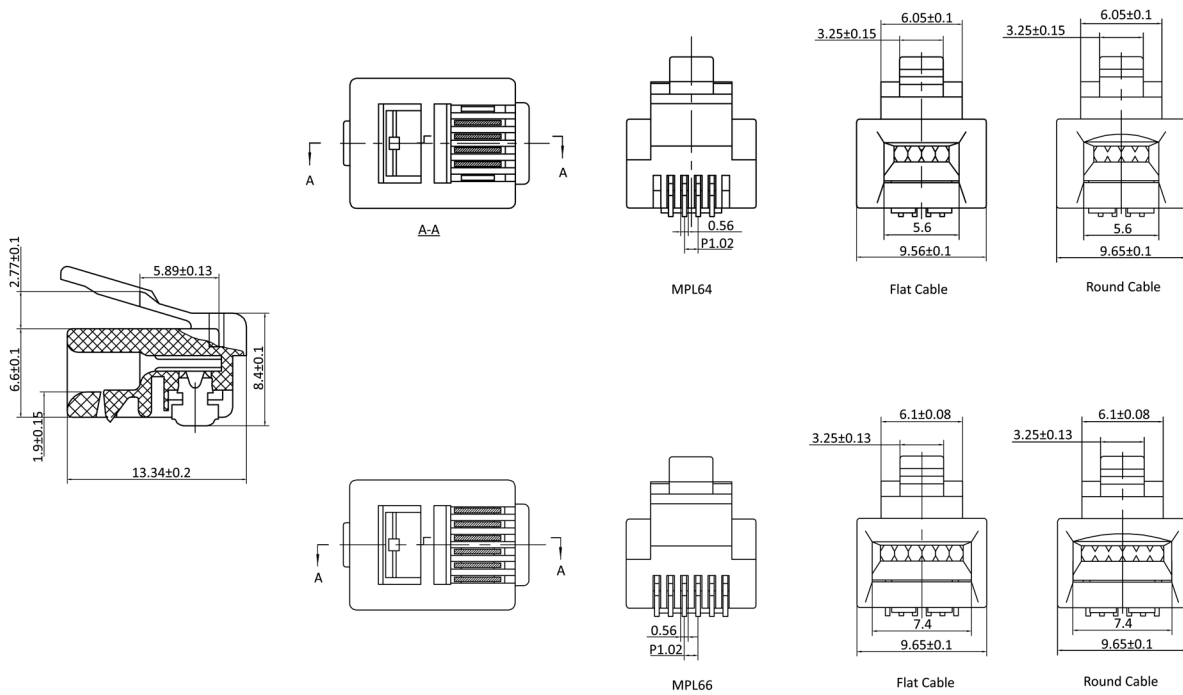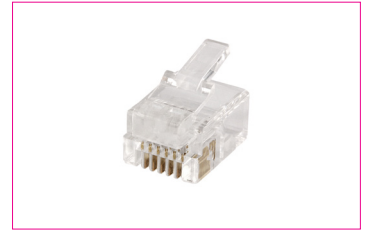

Order-Information

Identifier:	Conductors:	Version:
MPL6	#	#
Modular Plug 6P unshielded	4: 4C 6: 6C	R: for round cable empty: for flat oval cable