

Modular Plugs, unshielded

8P8C



SPECIFICATION:

Current rating: 1.5 A
Insulation resistance: 1000 M Ω min.
Contact resistance: 40 m Ω max.
Dielectric voltage: 1000 V AC
Operation temperature: -40 °C to +70 °C

MATERIAL:

Housing: Polycarbonate UL94V-2
Contacts: Phosphorbronze


FINISH:

Contacts: Gold Flash

HANDLING:

Packing: Bulk

RoHS
COMPLIANT

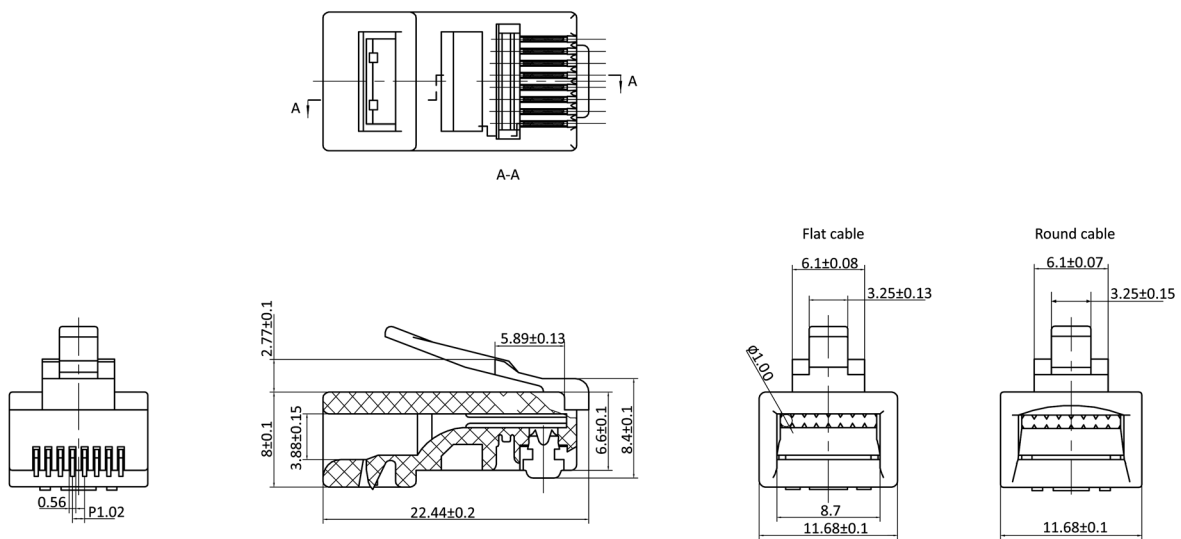

Order-Information

Identifier:

MPL88

Modular Plug 8P8C unshielded

Version:

#

empty: for flat oval cable

R: for round cable