

**Modular  
Plugs, unshielded**

10P10C



**RoHS  
COMPLIANT**

**SPECIFICATION:**

Current rating: 1.5 A  
Insulation resistance: 1000 MΩ min.  
Contact resistance: 20 mΩ max.  
Dielectric voltage: 1000 V AC  
Operation temperature: -40 °C to +125 °C  
Cable to tensile strength: 7.7 kg max.

**MATERIAL:**



Housing: Polycarbonate UL94V-2  
Contacts: Phosphorbronze

**FINISH:**


Contacts: Gold plated 3 μ"

**HANDLING:**




Packing: Bulk

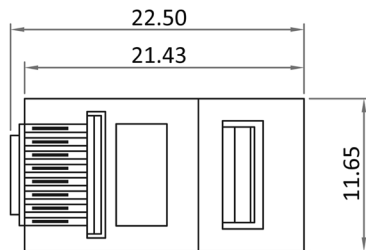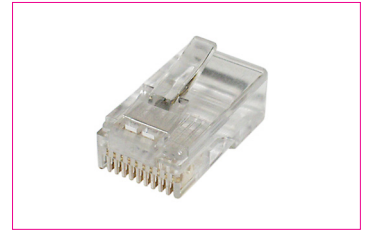

Flat Cable



Round Cable

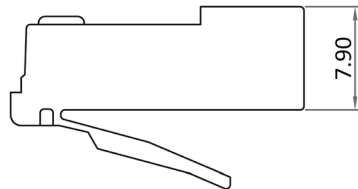

**Order-Information**

Identifier:

MPL10/10

Modular Plug 10P10C unshielded

Version:

#

empty: for flat oval cable

R: for round cable