

Modular Jacks, shielded

PCB



SPECIFICATION:

Current rating: 1.5 A
 Insulation resistance: 500 MΩ min.
 Contact resistance: 40 mΩ max.
 Dielectric voltage: 1000 V AC
 Operation temperature: 0 °C to +70 °C

MATERIAL:

Housing: PBT UL94V-0
 Contacts: Phosphorbronze
 Solder pins: Phosphorbronze
 Shield: Brass

FINISH:



Contacts: Gold over nickel
 Solder pins: Tin over nickel
 Shield: Nickel plated

HANDLING:




Processing: Wave soldering
 Packing: Tray

TOLERANCE:

.X ± 0.38
 .XX ± 0.25

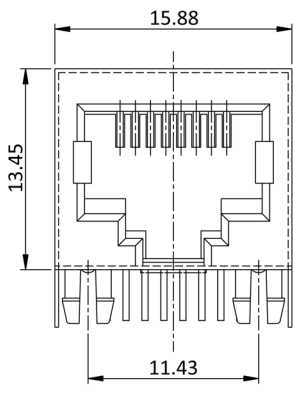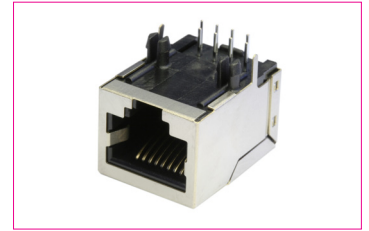

PCB Layout / Top View

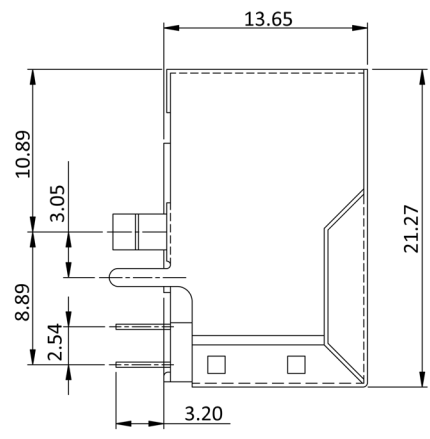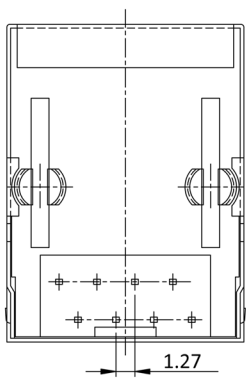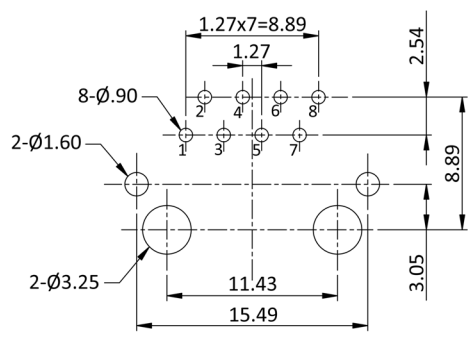

Order-Information

Identifier: MEB	Positions: 8 /	Conductors: 8 PG	Contact Plating: #
Modular Jack shielded, PCB mount	8: 8P	8: 8C	empty: 6 μ" Gold *
			B: 15 μ" Gold
			C: 30 μ" Gold
			D: 50 μ" Gold

* = standard