

Modular Jacks, shielded

Multiport 2



SPECIFICATION:

Current rating:	1.5 A
Insulation resistance:	500 MΩ min.
Contact resistance:	40 mΩ max.
Dielectric voltage:	1000 V AC
Operation temperature:	0 °C to +70 °C

MATERIAL:

Housing:	PBT UL94V-0
Contacts:	Phosphorbronze
Solder pins:	Phosphorbronze
Shield:	Brass

FINISH:

Contacts:	Gold over nickel
Solder pins:	Tin over nickel
Shield:	Nickel plated




HANDLING:

Processing:	Wave soldering
Packing:	Tray



TOLERANCE:

.X	± 0.38
.XX	± 0.25

RoHS
COMPLIANT

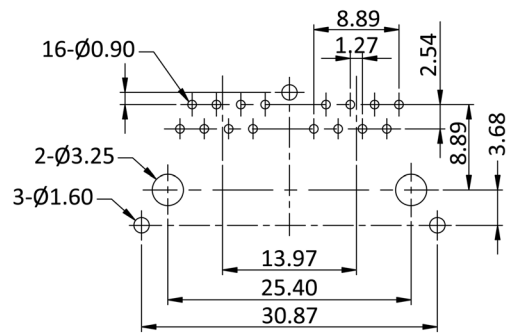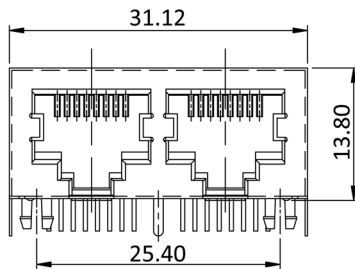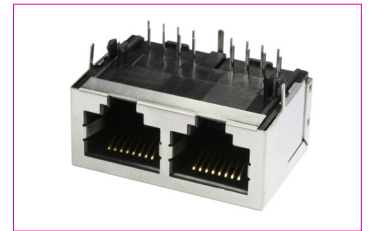

PCB Layout / Top View



Order-Information

Identifier:

3012S02

Modular Jack 2xRJ45 shielded, PCB mount

Contact Plating:

#

empty: 6 μ" Gold *

B: 15 μ" Gold

C: 30 μ" Gold

D: 50 μ" Gold

* = standard