

SPECIFICATION:

Current rating: 2.5 A
 Voltage rating: 250 V
 Insulation resistance: 1000 MΩ min.
 Contact resistance: 10 mΩ max.
 Dielectric voltage: 1000 V AC
 Operation temperature: -25 °C to +85 °C

MATERIAL:

Housing: Nylon 66 beige UL94V-2
 Contacts: Brass

FINISH:






Contacts: Tin plated

HANDLING:

Packing: Bulk

TOLERANCE:

.X ± 0.35
 .XX ± 0.25

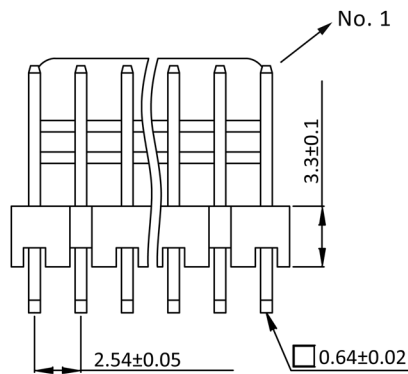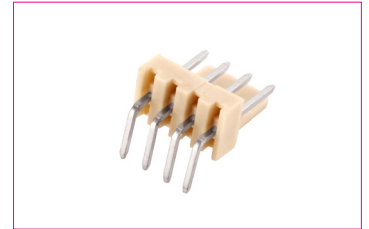

Order-Information

Identifier:	No. of contacts:	Version:
PSL	#	W
Wafer Series CV Pitch 2.54 mm single row	2: 1 x 2 3: 1 x 3 4: 1 x 4 : 20: 1 x 20	W: angled