

Pin Header
Pitch 2.54 mm straight

Single row, length 11.6 mm



RoHS
COMPLIANT

SPECIFICATION:

Current rating: 3 A
Insulation resistance: 1000 MΩ min.
Contact resistance: 20 mΩ max.
Dielectric voltage: 1000 V AC
Operation temperature: -40 °C to +105 °C

MATERIAL:



Housing: Nylon 6T UL94V-0
Contacts: Copper alloy

HANDLING:

Processing: Wave soldering
Packing: Bulk

TOLERANCE:

.X ± 0.35
.XX ± 0.25

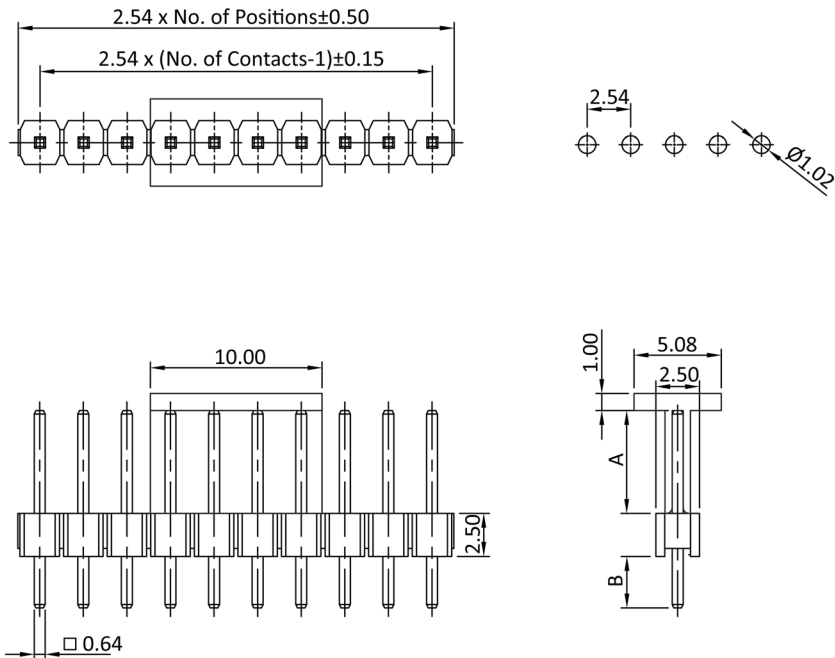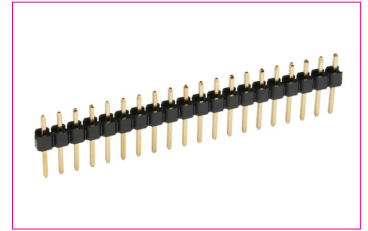

Order-Information

Identifier:	No. of contacts:	Contact plating:	Version:	Length:
SLSN	#	#	#	#
Pin Header Pitch 2.54 mm single row straight	2: 1 x 2 3: 1 x 3 4: 1 x 4 : 50: 1 x 50	G: Gold Flash * S: Selective A: 5 μ" Gold B: 10 μ" Gold C: 20 μ" Gold D: 30 μ" Gold T: Tin plated	O: w/o Cap * C: with Cap	A: A=6.1 B=3.0 * X: Special dimension also available

* = standard