

Pin Header
Pitch 2.54 mm straight

Double row, length 11.6 mm



SPECIFICATION:

Current rating: 3 A
 Insulation resistance: 1000 MΩ min.
 Contact resistance: 20 mΩ max.
 Dielectric voltage: 1000 V AC
 Operation temperature: -40 °C to +105 °C

MATERIAL:



Housing: Nylon 6T UL94V-0
 Contacts: Copper alloy

HANDLING:

Processing: Wave soldering
 Packing: Bulk

TOLERANCE:

.X ± 0.35
 .XX ± 0.25

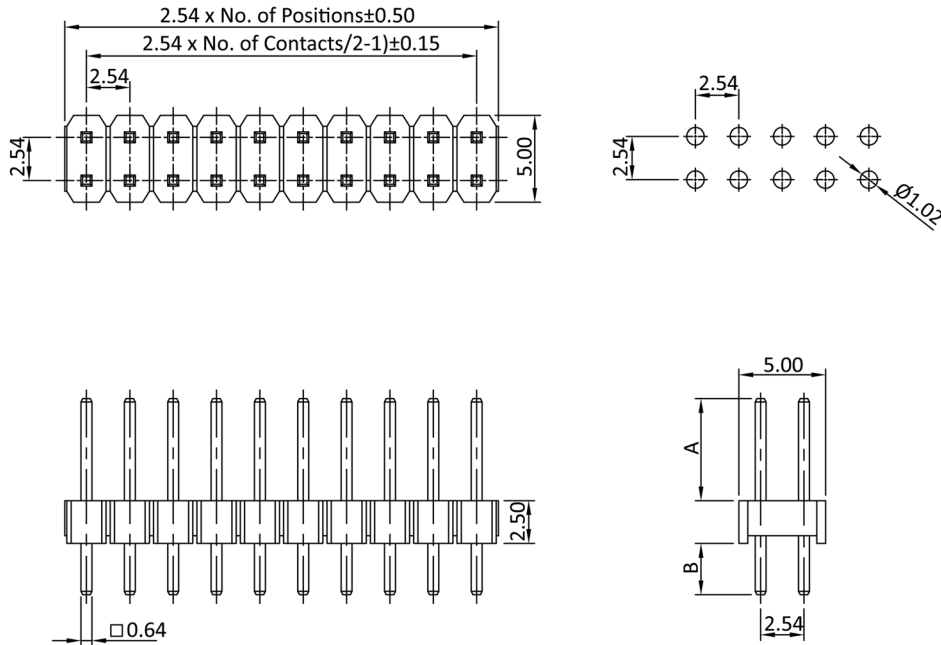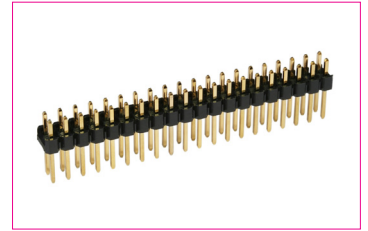

Order-Information

Identifier:	No. of contacts:	Contact plating:	Length:
SLSD	#	#	#
Pin Header Pitch 2.54 mm double row straight	4: 2 x 2 6: 2 x 3 8: 2 x 4 : 80: 2 x 40	G: Gold Flash * S: Selective A: 5 μ" Gold B: 10 μ" Gold C: 20 μ" Gold D: 30 μ" Gold T: Tin plated	A: A=6.1 B=3.0 * X: special dimensions also available

* = standard