

Pin Header
Pitch 2.54 mm angled

Single row



SPECIFICATION:

Current rating: 3 A
 Insulation resistance: 5000 MΩ min.
 Contact resistance: 10 mΩ max.
 Dielectric voltage: 1000 V AC
 Operation temperature: -40 °C to +105 °C

MATERIAL:



Housing: Nylon 6T UL94V-0
 Contacts: Brass

HANDLING:

Processing: Wave soldering
 Packing: Bulk

TOLERANCE:

.X ± 0.35
 .XX ± 0.25

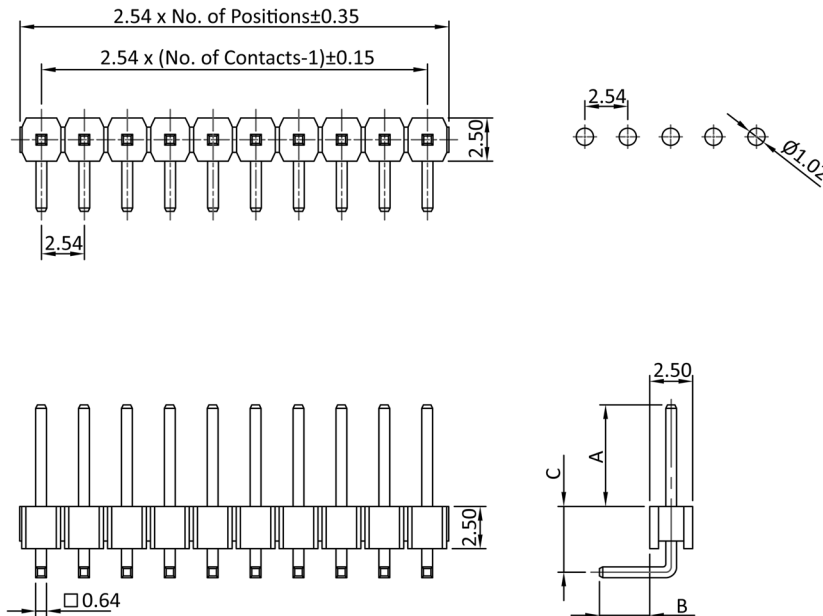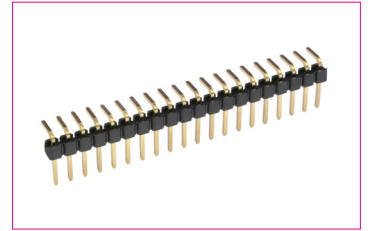

Order-Information

Identifier:	No. of contacts:	Contact Plating:	Length:
SL25WS	#	#	#
Pin Header Pitch 2.54 mm single row angled	2: 1 x 2	G: Gold Flash *	C: A=6.0 B=3.0 C=4.0 *
	3: 1 x 3	S: Selective	A: A=6.0 B=3.0 C=3.9
	4: 1 x 4	B: 10 μ" Gold	B: A=4.2 B=2.4 C=3.9
	:	C: 20 μ" Gold	D: A=5.84 B=2.54 C=4.06
	50: 1 x 50	T: Tin plated	E: A=10.0 B=3.2 C=8.0
			F: A=5.8 B=3.0 C=4.3
			G: A=3.5 B=3.0 C=3.7
			H: A=3.5 B=3.0 C=3.9
			X: Special dimension also available

* = standard