

**Pin Header
Pitch 2.54 mm angled**

Double row



SPECIFICATION:

Current rating: 3 A
 Insulation resistance: 1000 MΩ min.
 Contact resistance: 20 mΩ max.
 Dielectric voltage: 1000 V AC
 Operation temperature: -40 °C to +105 °C

MATERIAL:



Housing: Nylon 6T UL94V-0
 Contacts: Brass

HANDLING:

Processing: Wave soldering
 Packing: Bulk

TOLERANCE:

.X ± 0.35
 .XX ± 0.25

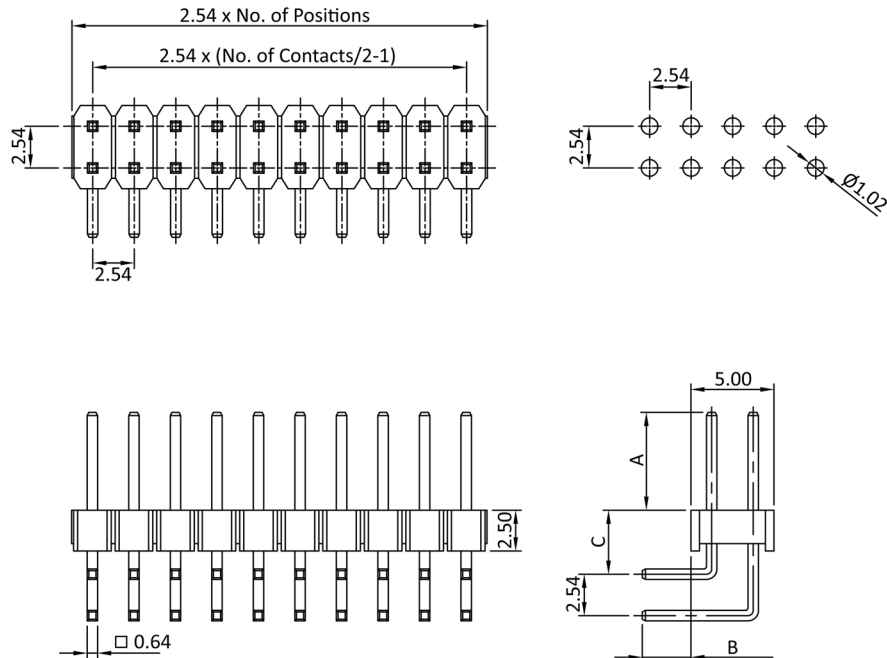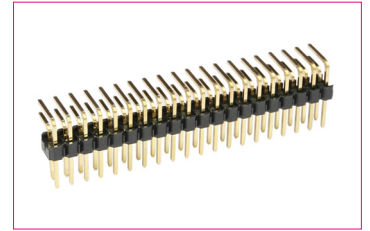

Order-Information

Identifier:	No. of contacts:	Contact Plating:	Length:
SL25WD	#	#	#
Pin Header Pitch 2.54 mm double row angled	4: 2 x 2	G: Gold Flash *	A: 6.0 B=3.0 C=3.9 *
	6: 2 x 3	S: Selective	B: A=5.84 B=2.54 C=4.06
	8: 2 x 4	B: 10 μ" Gold	F: A=3.0 B=3.0 C=4.3
	:	C: 20 μ" Gold	X: Special dimension also available
	100: 2 x 50	T: Tin plated	

* = standard