


Type Designation CR 123 A
 Designation IEC CR 17345
 System Li-MnO₂
 Shelf Life * 10 years
 Nominal Voltage [V] 3
 Typical Capacity C [mAh] 1430
 Permissible Temperature Range - 20 °C ... 60 °C
 Weight, approx. [g] 16
 Volume [ccm] 7.5
 Dimensions [mm] min: max:

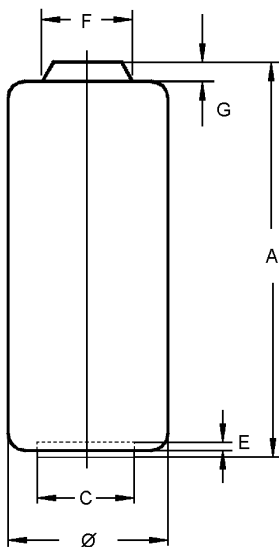

	min	max
∅	16.0	17.0
A	33.5	34.5
C	11.0	11.5
E	0.5	0.9
F	5.9	6.1
G	1.0	1.2

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	1,55
Photo	900 mA	Time [cy]	1660
		Capacity [Ah]	1.245
		Energy [Wh]	3.0
Discharge Type	Load	End Voltage[V]	2.0
Service Output Test	100 Ω	Time [h]	51.0
24h/d, 7d/w		Capacity [Ah]	1.43
		Energy [Wh]	3.92

* In consideration of typical loss of capacity at storage and application.

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries