




ENR SILVER OXIDE 377/376 DATA SHEET

WATCH BATTERIES



Industry Standard Dimensions

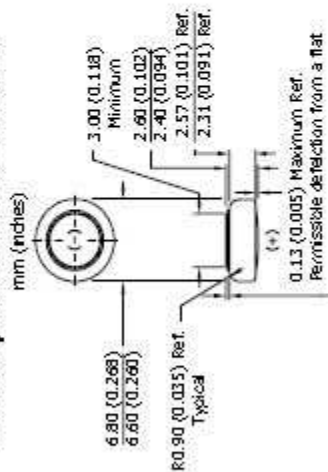

0.06 (0.002) Minimum Ref.

(Applies to top edge of gasket or edge of crimp; whichever is higher.)

DESIGNED FOR USE ON CONTINUOUS LOW DRAIN HIGH PULSE ON DEMAND

Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

Schedule: Continuous
Typical Drain @ 1.52V:
0.032 milliamperes
Load: 47K ohm



ZERO MERCURY



Specifications

Chemical System: Silver Oxide (Zn/Ag₂O)
Designation: ANSI/NEDA-1176SO, IEC-SR66
Nominal Voltage: 1.55 volts
Typical Capacity: 24 mAh* (to 1.2 volts)
Capacity Test: 47K ohm continuous drain at 21°C
Typical Weight: 0.42 grams (0.015 oz.)
Typical Volume: 0.09 cubic centimeters (0.0063 cubic inch)
Impedance (40 Hz): 15 to 30 ohms


*Varies according to the applied load, temperature, and cutoff voltage.

Temperature Characteristics

Typical Performance at Low Discharge Rates

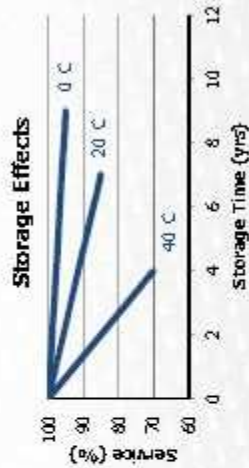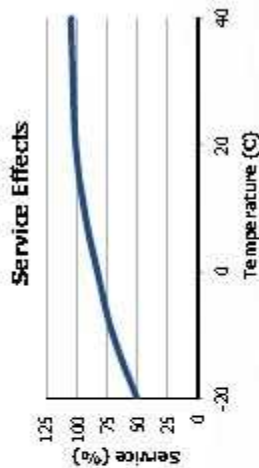

Cross Section

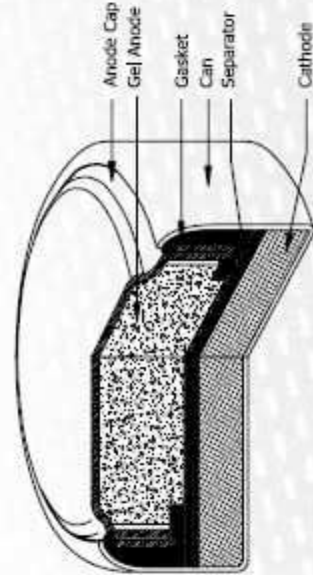

IMPORTANT NOTICE

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. Contents herein do not constitute a warranty.