



Features

- Special HALED design with Anti-Glare Lens and Reflector
- Integrated design, driver inside, easy to install
- Perfect for classic and modern downlight and fitting
- CE and RoHS compliant
- Smooth dim to warm function
- 85% energy saving
- Brushed Alu and Nickel also available

Applications

- Home, villa and other residential buildings
- Shopping mall, Hotels, restaurants, bars, cafes

Product Overview

Wattage (W)	10
Incandescent Equivalent (W)	75
Dimmable	Yes/dim to warm
Socket	-
Lumens (lm) by 90°	600
Luminous intensity(cd)	1200
Energy efficiency class	A
PF	>0.9
CCT (K)	2700-2300
CRI (Ra)	95
Voltage (V)	AC176-264
Current (mA)	46
Frequency(Hz)	50/60
Beam Angle (deg)	36
Lifespan(hrs)	25000 / 100000 Switching Cycles
Working Temperature (°C)	-20 ~ 40
Storage Temperature (°C)	-20 ~ 60


10W HALED Module WCVM002W10

Physical data

Weight (g)	104
Lamp Length (mm) - C/L	50
Max. Lamp Diameter (mm) - D	50
Lamp dimension equal to filament lamp equivalent	Yes
Designed for optimum use in non standard conditions	No
Fluorescent lamp replacement	No
Single packaging type	Box
Single package dimensions (L x W x H) (cm)	50 x 50 x 60 / 1PCS
Inner package dimensions (L x W x H) (cm)	270 x 110 x 80 / 10PCS
Outer package dimensions (L x W x H) (cm)	580 x 285 x 185 / 100PCS

* Do not use in close luminaire.

Technical Drawings

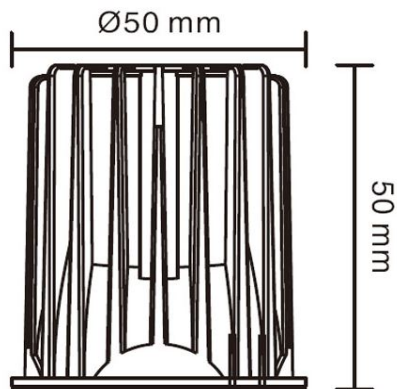

Energy Label

