


	REVISED	DR	APP

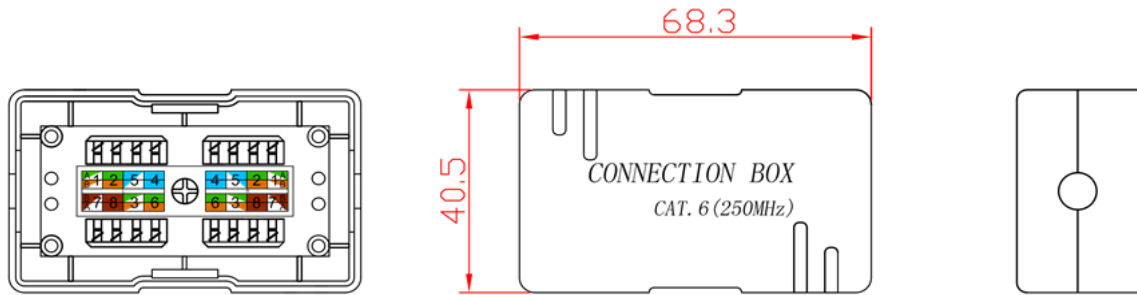

NOTES:

ELECTRICAL:


1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1. 5AMP
3. CONTACT RESISTANCE: 100MILLIOHMS MAX
4. INSULATION RESISTANCE: 100 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40°TO+85°
2. OPERATION: 0°TO70°

MECHANICAL:

1. HOUSING MATERIAL: PC
2. INSERT MATERIAL: FAME RETARDANCY ABS
3. PCB MATERIAL: FR-4 T=1. 6mm
4. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN T=0. 30mm
5. IDC CONTACT MATERIAL: PHOSPHOR BRONZE T=0. 50mm WITH TIN PLATING

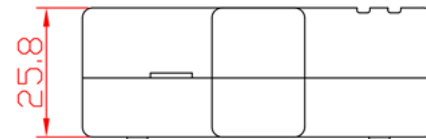

TIA/EIA 568A Wiring

- | | | |
|---|--|------------------|
| 1 | | White and Green |
| 2 | | Green |
| 3 | | White and Orange |
| 4 | | Blue |
| 5 | | White and Blue |
| 6 | | Orange |
| 7 | | White and Brown |
| 8 | | Brown |

TIA/EIA 568B Wiring

- | | | |
|---|--|------------------|
| 1 | | White and Orange |
| 2 | | Orange |
| 3 | | White and Green |
| 4 | | Blue |
| 5 | | White and Blue |
| 6 | | Green |
| 7 | | White and Brown |
| 8 | | Brown |



1	CONNECTORS	CAT 6 LSA CONNECTION BOX 250 MHZ
2	MOLDING	
3	CABLE	PLASTIC HOUSING, METALLIZED
NO	PART NAME	

DESCRIPTION		CAT 6 LSA CONNECTION BOX					
SIZE	A4	DATE		CHECKED		TOL	75001
UNIT	MM	DRAWN		APPROVED			
CUSTOM TARIF NO.: 85366990990							



S-Conn Handels GmbH
Am Mühlberg 8
91477 Markt Bibart

Tel. 09162/ 98 93 8-0
Fax 09162/ 98 93 8-20
info@s-conn.de

S/CONN

maximum connectivity

www.s-conn.de