


PHILIPS


CoreLine SlimDownlight

DN135




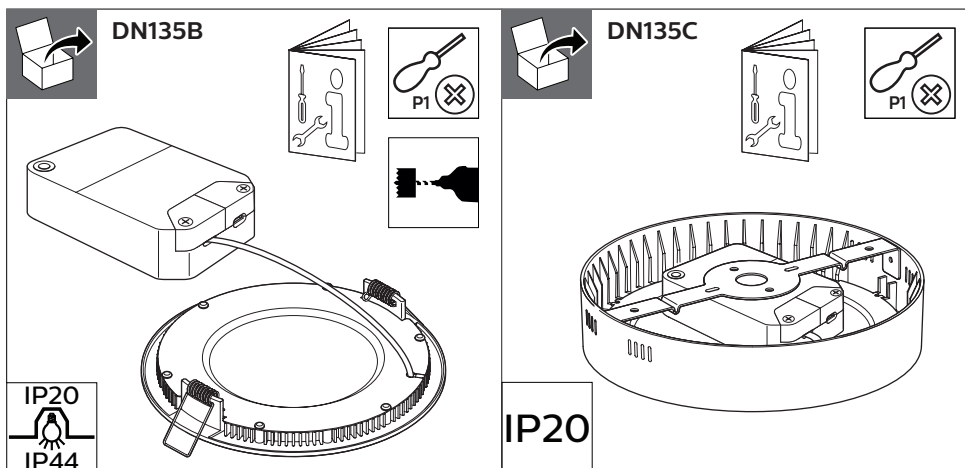








	System lumen(lm)	CCT(K)	Driver	P (W)	Ø mm	kg
DN135B LED10S	1000	3000/4000	PSU	13.5	150-155	0.300
DN135B LED20S	2000	3000/4000	PSU	28.0	200-205	0.600
DN135C LED10S	1000	3000/4000	PSU	13.5	-	0.525
DN135C LED20S	2000	3000/4000	PSU	28.0	-	0.850

DN135B

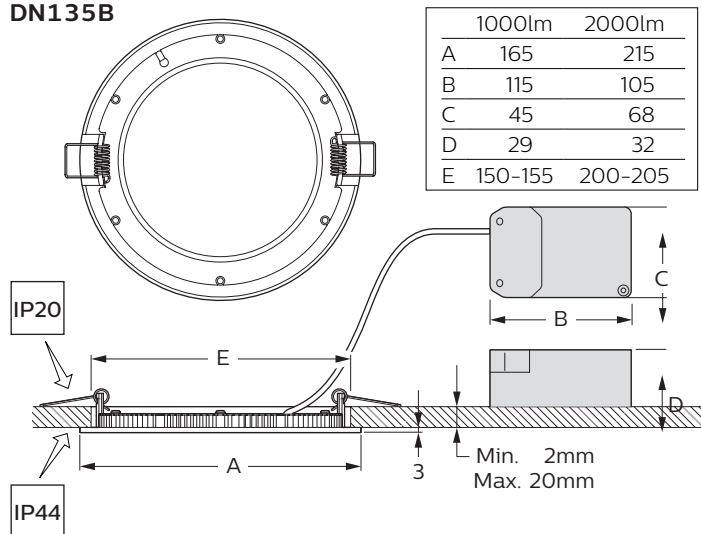

DN135C

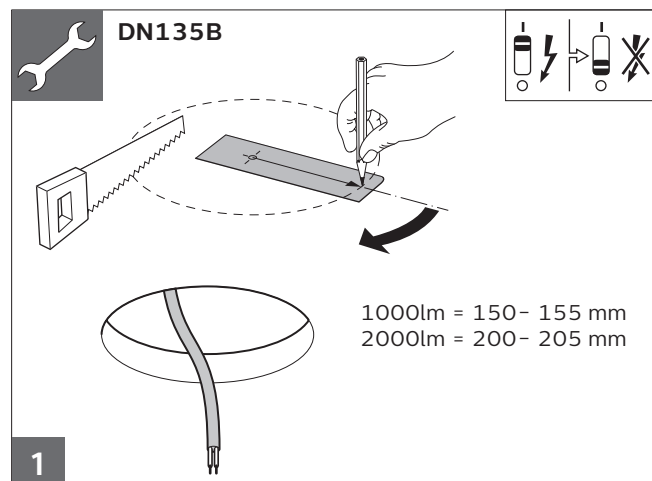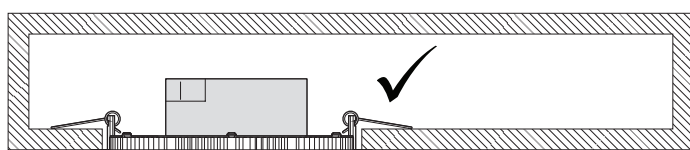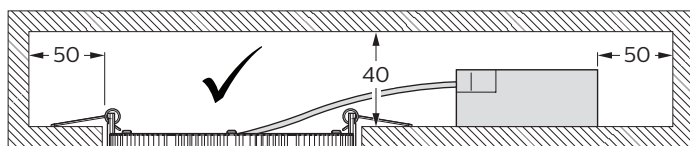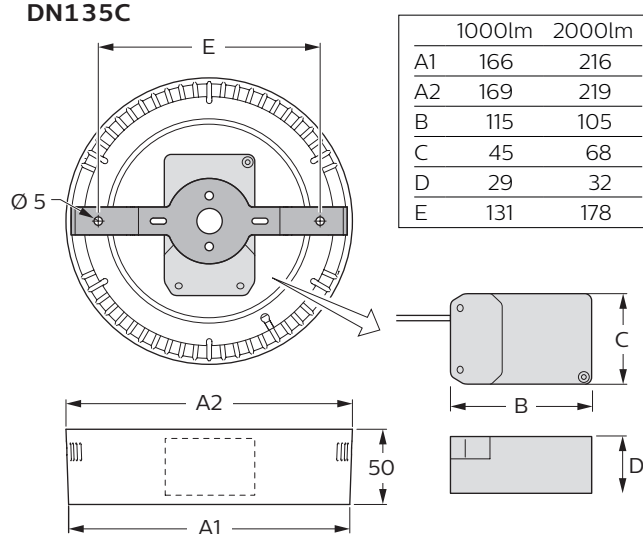

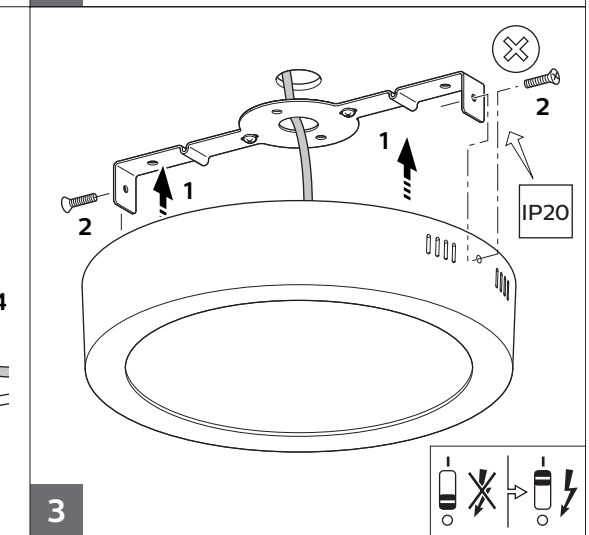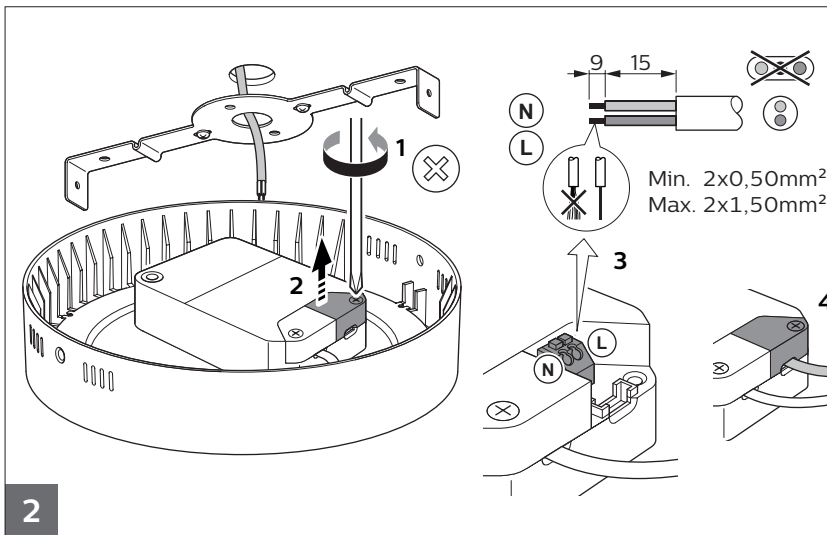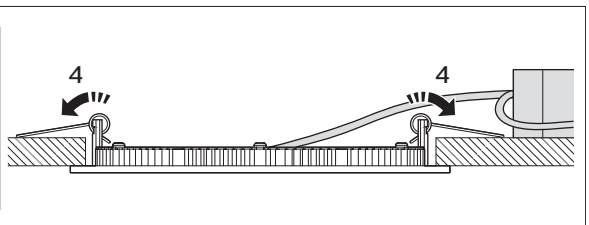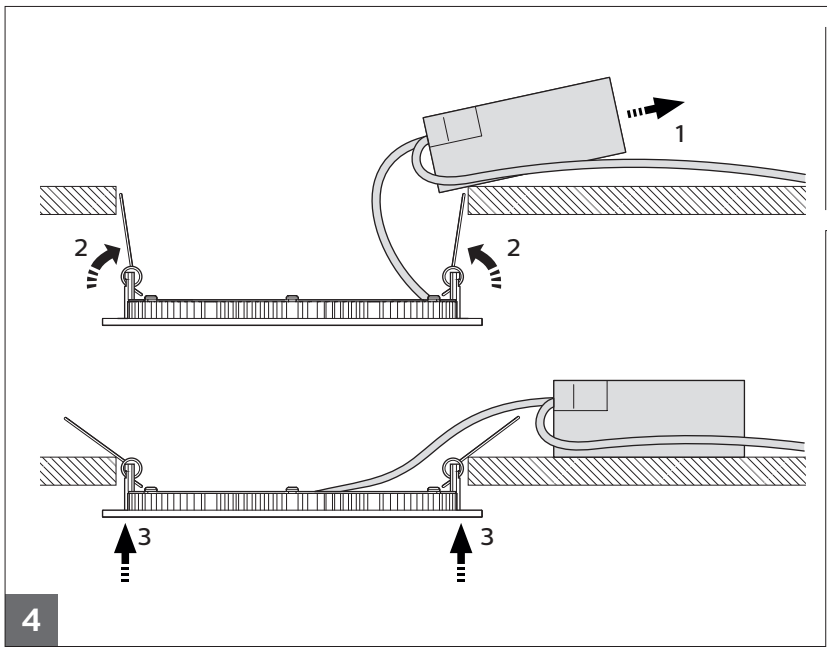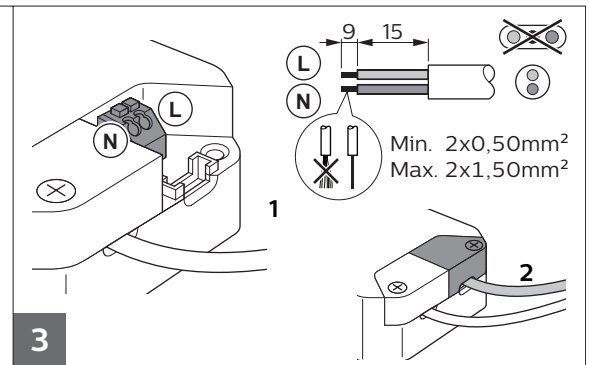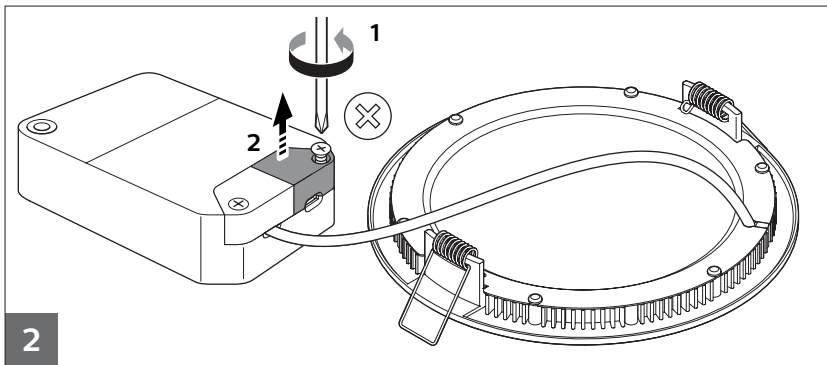

Inrush current

	1000lm	2000lm
Electrical characteristics		
I _{max} (A)	3.4	17
T _{ref} (μs)	29	250
MCB	Downlights Max.	
B-10 A	153	71
B-13 A	199	93
B-16 A	245	115
C-10 A	153	71
C-13 A	199	93
C-16 A	245	115